




An interpretation of:
Petronas Towers, César Pelli, KUALA LUMPUR (Malaysia), 1996






PROFILES FOR TERRACES

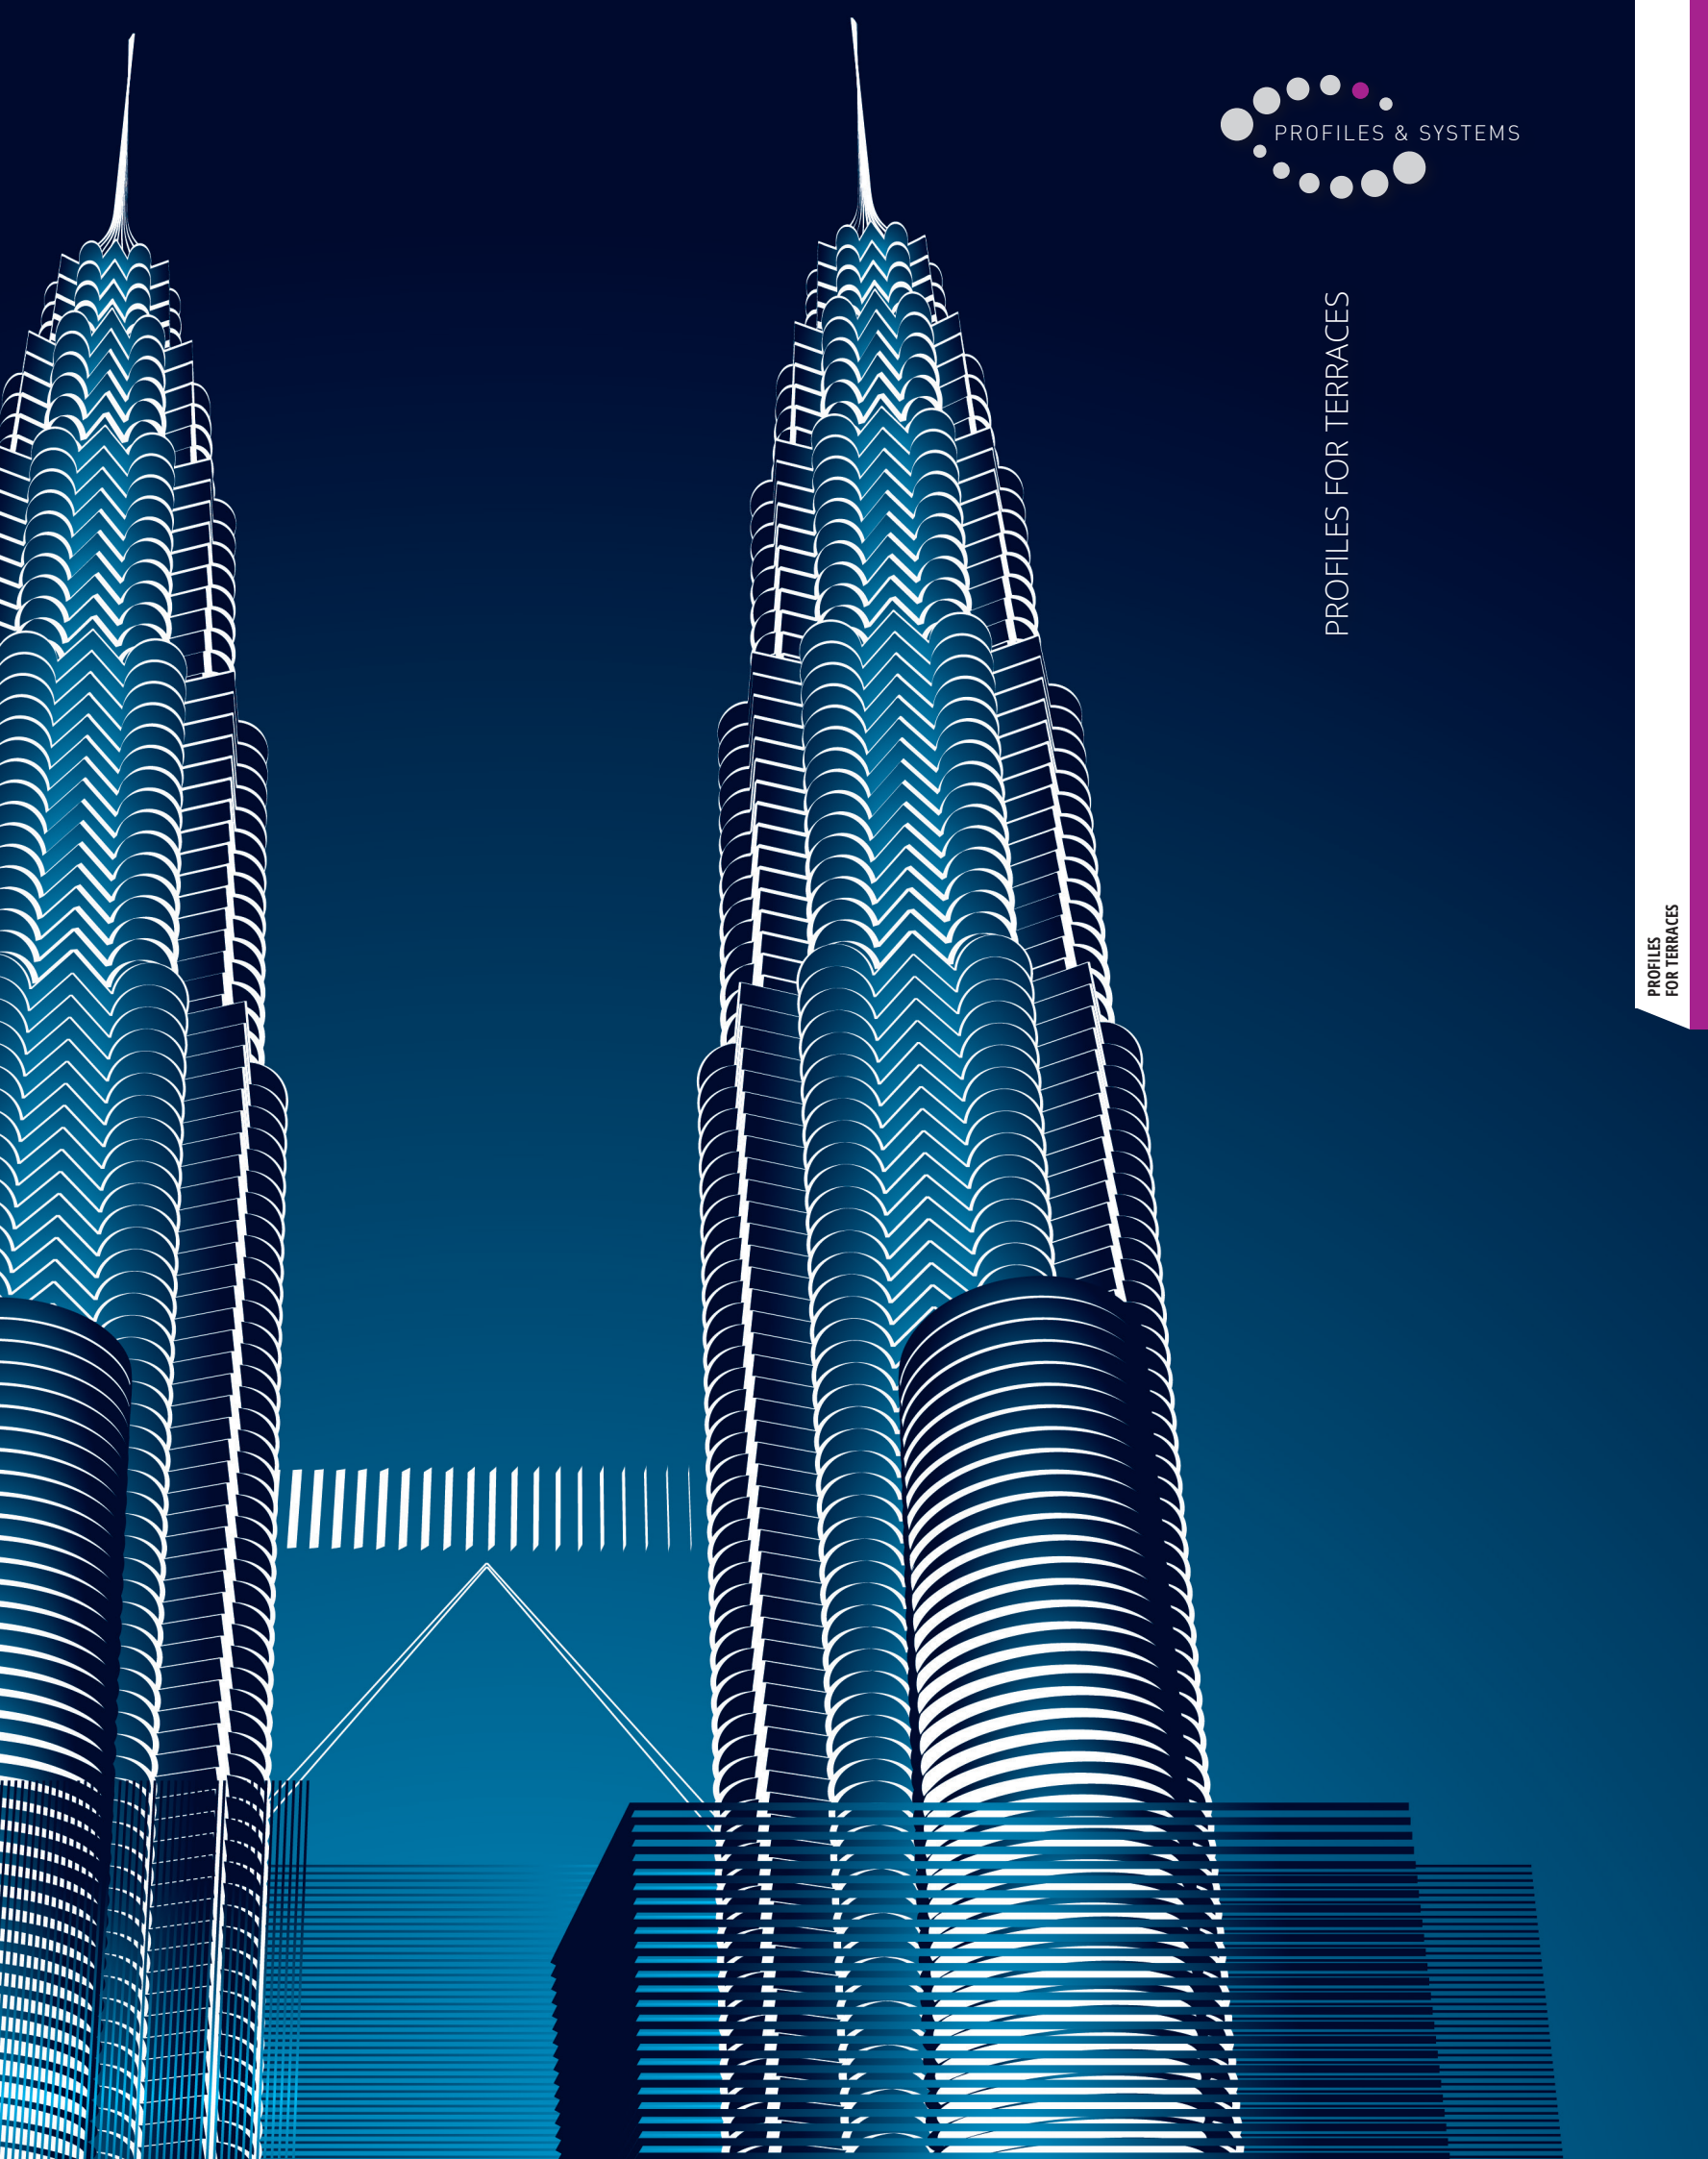

PROTERRACE DOUBLE DRIP

VARNISHED ALUMINIUM

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODES0 DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

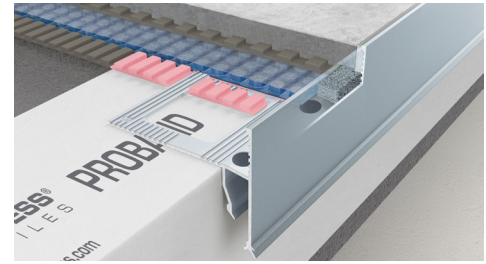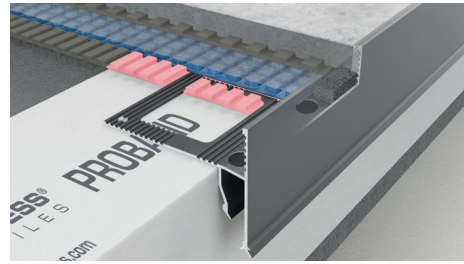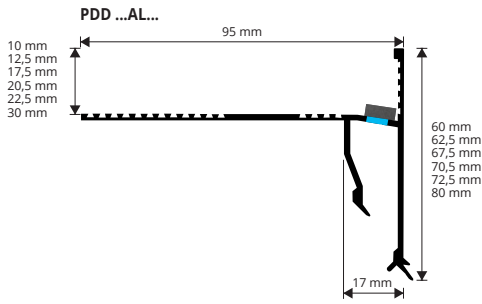

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm


Article	H mm	€/lm	€/Pc
⊕ PDD 10AL...	10	37,00	99,90
⊕ PDD 125AL...	12,5	38,50	104,00
⊕ PDD 175AL...	17,5	40,50	109,35
⊕ PDD 205AL...	20,5	42,00	113,40
⊕ PDD 225AL...	22,5	43,50	117,45
⊕ PDD 30AL...	30	51,82	139,91

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PDD 175AL... (white) PDD 175ALBF.

EXTERNAL CORNERS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack
⊕ AEPDD 10AL.../10	10	47,00	470,00
⊕ AEPDD 125AL.../10	12,5	47,50	475,00
⊕ AEPDD 175AL.../10	17,5	49,00	490,00
⊕ AEPDD 205AL.../10	20,5	51,00	510,00
⊕ AEPDD 225AL.../10	22,5	53,00	530,00
⊕ AEPDD 30AL.../10	30	55,00	550,00

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

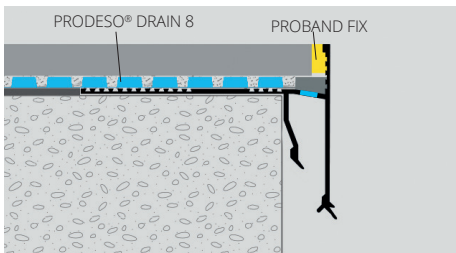

1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour.
2. Nail the outside corners to the screed.
3. Cut the PROTERRACE DOUBLE DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
4. Lay the desired waterproofing system.
5. Lay the tiles leaving at 5 mm between the tile and the profile.
6. Seal the space between tile and profile with **PROBAND FIX**.

JOINTS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack
⊕ GINPDD 10AL...	10	10,00	100,00
⊕ GINPDD 125AL...	12,5	10,50	105,00
⊕ GINPDD 175AL...	17,5	12,00	120,00
⊕ GINPDD 205AL...	20,5	12,50	125,00
⊕ GINPDD 225AL...	22,5	13,00	130,00
⊕ GIPDD 30AL...	30	14,50	145,00

INTERNAL CORNERS - pack. 10 Pcs


Article	H mm	€/Pc	€/Pack
⊕ AIPDD 10AL.../10	10	49,00	490,00
⊕ AIPDD 125AL.../10	12,5	49,50	495,00
⊕ AIPDD 175AL.../10	17,5	51,00	510,00
⊕ AIPDD 205AL.../10	20,5	53,00	530,00
⊕ AIPDD 225AL.../10	22,5	55,00	550,00
⊕ AIPDD 30AL.../10	30	57,00	570,00

HOW TO REQUEST SEASIDE TREATMENT


When placing your order please add S to the article's number
Example: PDD 175ALGF (seaside) = **PDD 175ALGFS**
price for seaside treatment +50% on the gross price.




GINPDD ...AL...



AEPDD ...




AIPDD ...

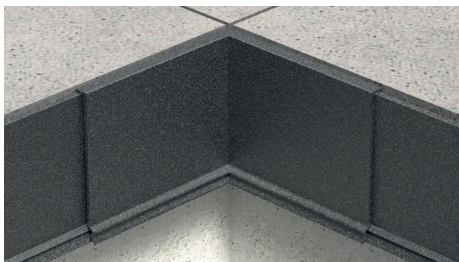

INTERNAL ANGULAR JUNCTION

Article	€/Pc
⊕ AICPDD 10AL...	43,00
⊕ AICPDD 125AL...	44,00
⊕ AICPDD 175AL...	45,00
⊕ AICPDD 205AL...	46,00
⊕ AICPDD 225AL...	47,00
⊕ AICPDD 30AL...	50,00

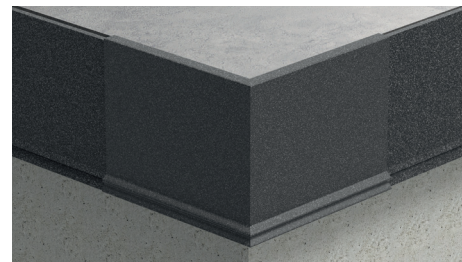

EXTERNAL ANGULAR JUNCTION

Article	€/Pc
⊕ AECPPDD 10AL...	41,00
⊕ AECPPDD 125AL...	42,00
⊕ AECPPDD 175AL...	44,00
⊕ AECPPDD 205AL...	45,00
⊕ AECPPDD 225AL...	46,00
⊕ AECPPDD 30AL...	49,00



END CAP

Article	Pcs/Pack	€/Pack
⊕ TPDD AL.../2	2	6,27

The code of the selected colour must be added to the article code.
E.g.: TPDD AL... (white) TPDD ALBF

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLOURS ON DEMAND

EMBOSSED		SEMIGLOSSY			
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

STONE LINE - COLOURS ON DEMAND

SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragr	SL08 - Stone antradark	SL09 - Stone bronze	SL12 - Stone black
SL13 - Stone oyster grey	SL14 - Stone taupe grey	SL15 - Stone grey smoke	SL16 - Stone grey gun	SL17 - Stone tobacco	SL18 - Stone white cement				




PROTERRACE DOUBLE DRIP & PRODES® DRAIN 8 SYSTEM




PROFILES
FOR TERRACES

© 2024. All rights reserved by Progress Profiles. Printed in Italy

Functions




UNCOUPLING




WATERPROOFING




DRAINAGE



VAPOUR MANAGEMENT




MICRO-VENTILATION



WATER RUNOFF

Solutions for your terrace

Thanks to **PRODES® DRAIN 8 MEMBRANE** and **PROTERRACE DOUBLE DRIP**, PROGRESS PROFILES has patented a new system capable of combining a correct uncoupling, a safe waterproofing and drainage with a right runoff of rainwater. **PRODES® DRAIN 8** is a draining, uncoupling and waterproofing membrane that helps the drying of the undertile adhesive and inhibits the formation of efflorescence and triacetate ascents. It also guarantees long life for flooring. **PROTERRACE DOUBLE DRIP** is a drip profile that protects the edges of the tiles, prevents water filtration inside the screed and ensures proper outflow of rainwater. Two systems of excellence that combined enhance and protect quality exteriors and restore full livability, in ideal continuity with the internal environments.

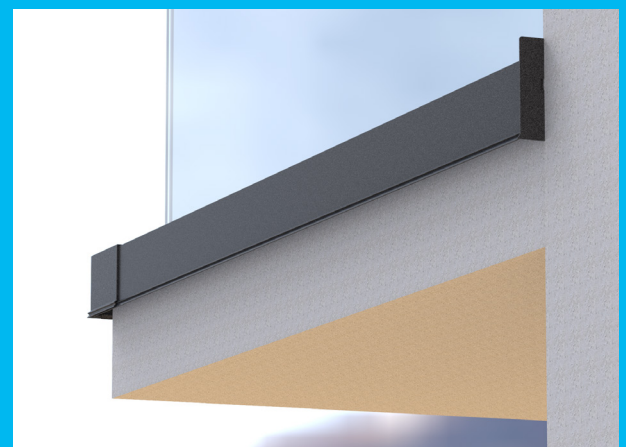


PROTERRACE DRAIN FDP


VARNISHED/COATED ALUMINIUM

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PFDP 10AL...
scale 1:2

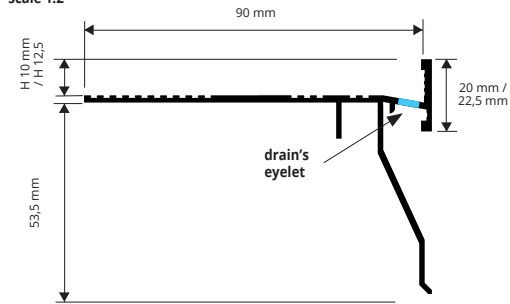


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

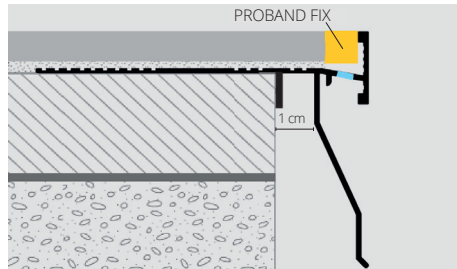

1. Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with **PROBAND FIX (P.186)**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDP 10ALGF (seaside) = **PFDP 10ALGFS**
price for seaside treatment +50% on the gross price.

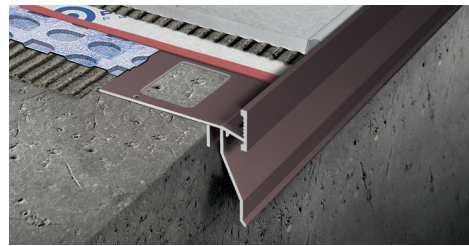

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PFDP 10AL...	10	29,00	78,30
PFDP 125AL...	12,5	30,00	81,00

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand)
The code of the selected colour must be added to the article code.
E.g.: PFDP 10 AL... (white) PFDP 10 ALB.

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLOURS ON DEMAND

EMBOSSED		SEMIGLOSSY	
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)
		E - Beige (1019)	T - Dark brown (8019)



EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPFDP 10AL.../10	42,04	420,40
AEPFDP 125AL.../10	42,43	424,30


INTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AIPFDP 10AL.../10	46,29	462,90
AIPFDP 125AL.../10	46,68	466,80

JOINTS - pack. 1 Pc upper + 1 Pc lower

Article	H mm	€/Pack.
GINFDP ...AL .../1	10/125	7,71


Choose the desired height and finish.
E.g.: 10 mm joint with finish A - GINFDP 10AL/10




AEPFDP 10/125AL...



AIPFDP 10/125AL...






GINFDP 10/125AL...

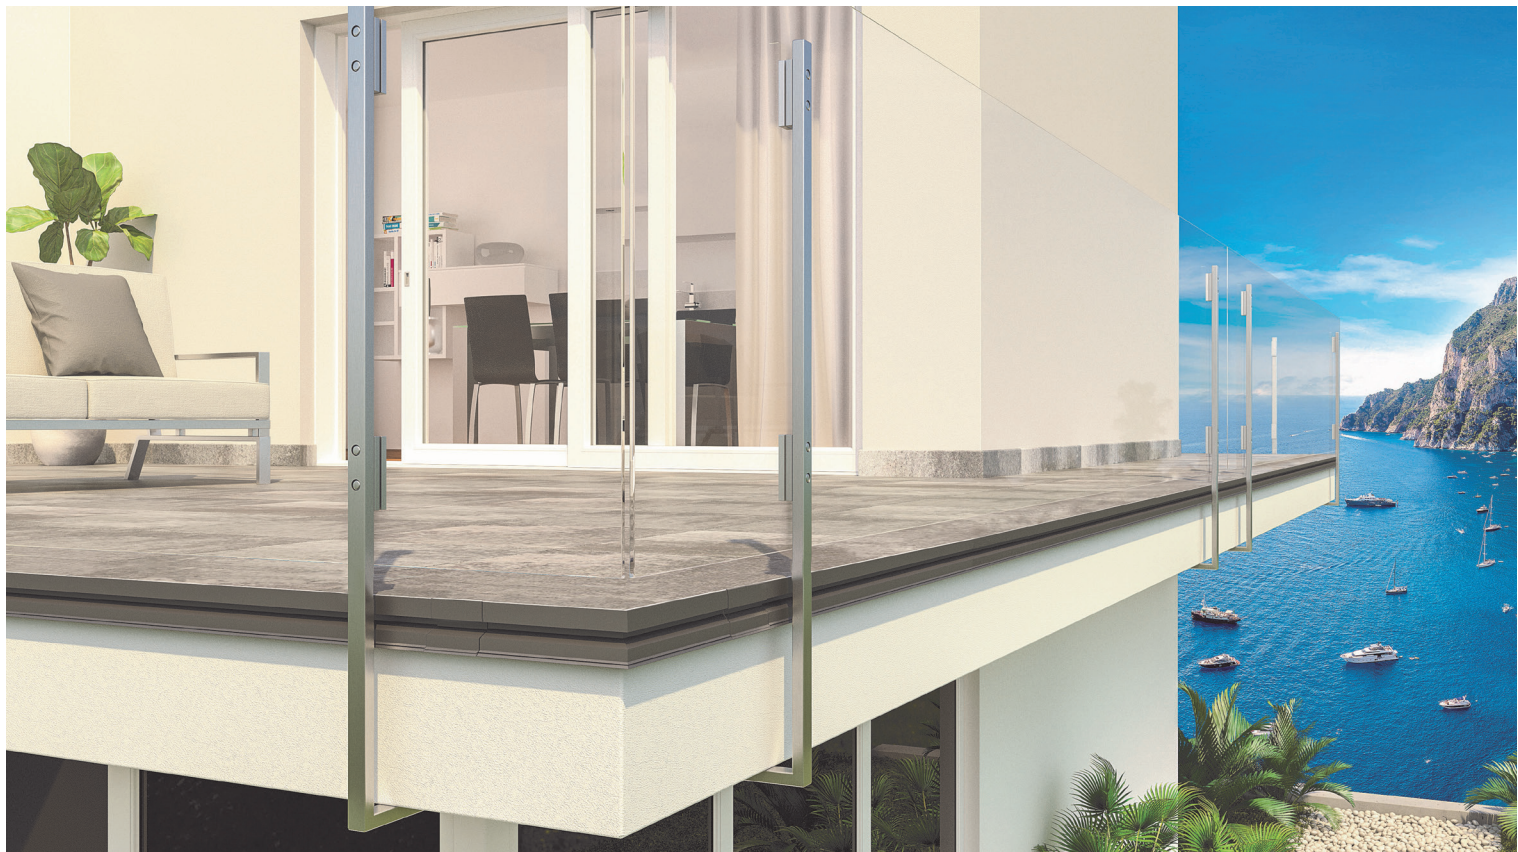

PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is equipped with a spacer that ensures its correct positioning, and a draining adhesive strip that prevents silicone from blocking the drainage holes. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE DRAIN DRIP

VARNISHED/COATED ALUMINIUM

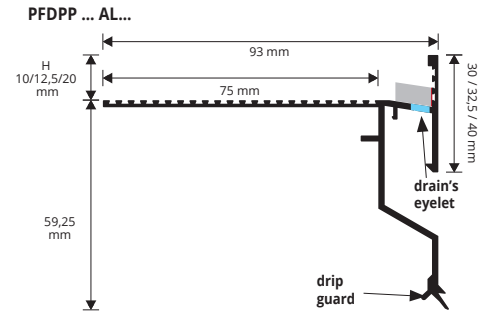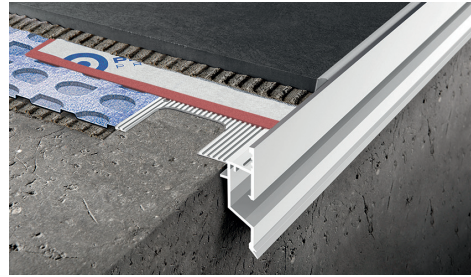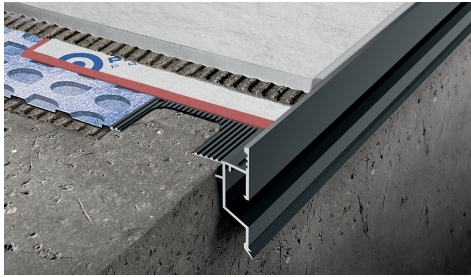


VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PFDPP 10AL...	10	36,51	98,58
PFDPP 125AL...	12,5	37,80	102,06

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PFDPP 10 AL... (white) PFDPP 10 ALBF.


EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/pack
AEPFDPP 10AL.../10	46,16	461,60
AEPFDPP 125AL.../10	46,68	466,80




INTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/pack
AIPFDPP 10AL.../10	50,80	508,00
AIPFDPP 125AL.../10	51,45	514,50




END CAPS - Pack. 2 PCS

Article	€/Pc	€/pack
TPFDPP AL.../2	6,27	12,54

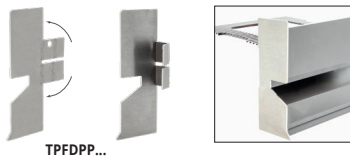

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

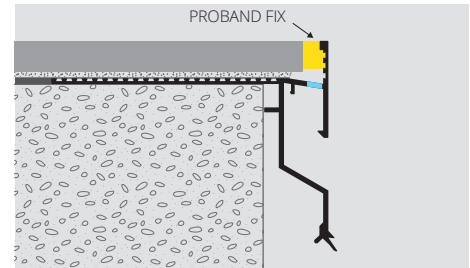

1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour.
2. Fix the external corners to the screed (at least 1 cm from it) with nails.
3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile.
4. Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
5. Lay the desired waterproofing system.
6. Lay the tiles leaving at 5 mm between the tile and the profile.
7. Seal the space between tile and profile with **PROBAND FIX (P.186)**.

JOINTS - pack. 1 upper + 1 lower

Article	€/Pack
GINFDPP 10AL .../1	9,87
GINFDPP 125AL .../1	10,38




HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDPP 10ALGF (seaside) = **PFDDPP 10ALGFS**
price for seaside treatment +50% on the gross price.

EMBOSSED COLOURS



BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
-------------------	------------------	------------------------------	------------------------

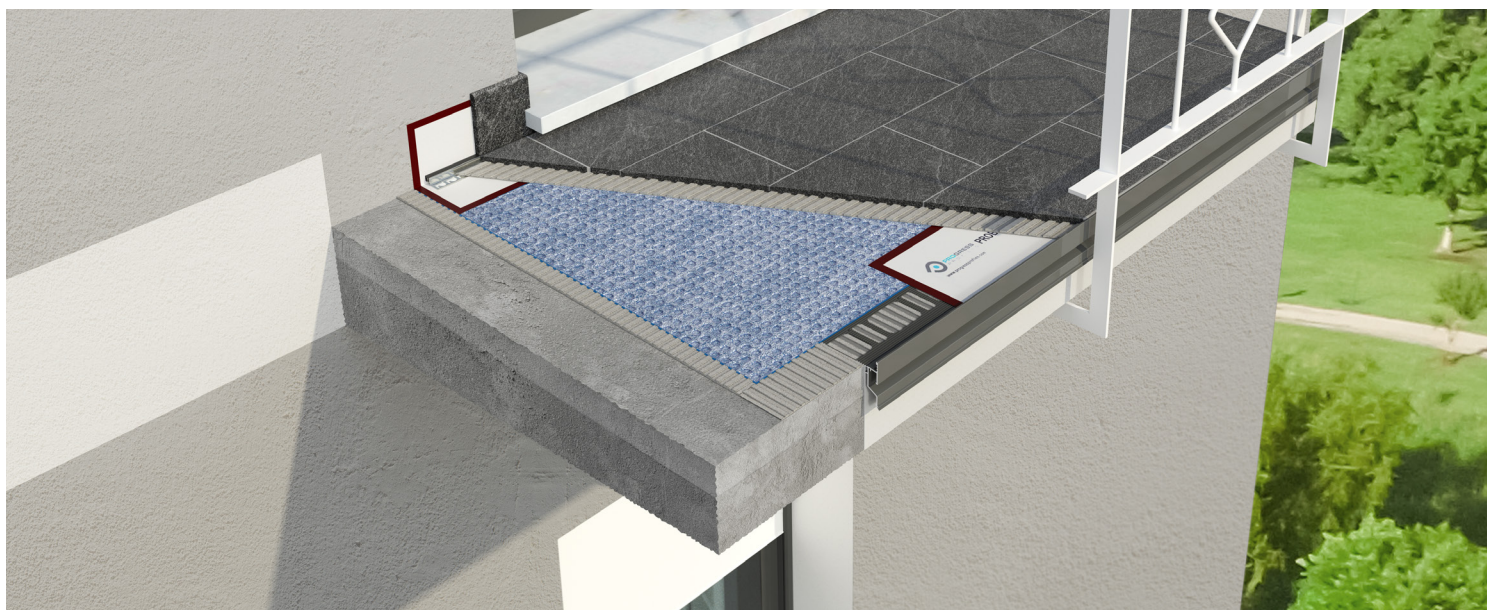


PROTERRACE ECO DRIP

VARNISHED/COATED ALUMINIUM

PROTERRACE ECO DRIP is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The front the profile is equipped with a double drip to improve the push away of water from the wall. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

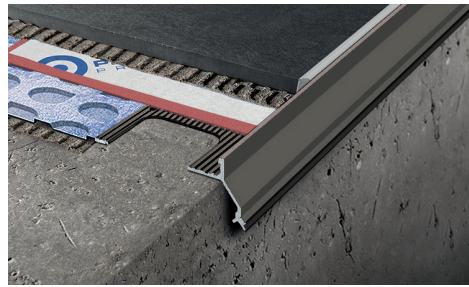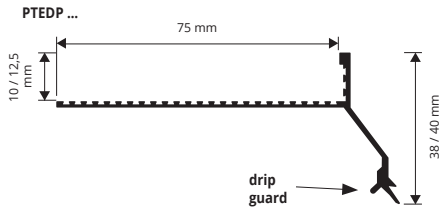

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

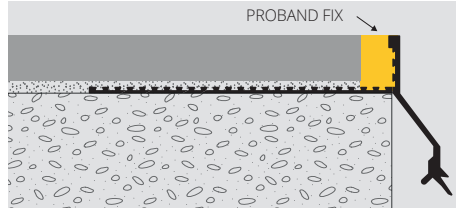

1. Choose "PROTERRACE ECO DRIP" according to the tile thickness.
 2. Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails.
 3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
 4. Lay the tiles, leaving about 5 mm between tiles and profile.
 5. Seal the space between tiles and profile using **PROBAND FIX**.
- PROFILE BENDING:**
1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PTEDP 10ALGF (seaside) = **PTEDP 10ALGFS**
price for seaside treatment +50% on the gross price.

VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PTEDP 10AL...	10	15,97	43,12
PTEDP 125AL...	12,5	17,24	46,55

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand)
The code of the selected colour must be added to the article code.
E.g.: PTEDP 10AL... (gray) PTEDP 10GFAL.



EXTERNAL CORNER - pack 10 Pc

Article	€/Pc	€/Pack
AEDDP 10AL.../10	22,20	222,00
AEDDP 125AL.../10	22,82	228,20

GINEDP 10/125ALGF



AEDDP 10/125ALGF

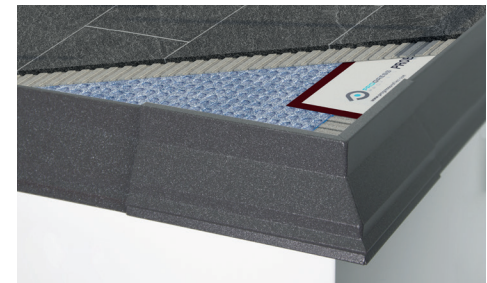

JOINTS - pack. 2 / 10 Pcs

Article	€/pack. 2Pcs	€/pack. 10Pcs
GINEDP 10AL... /...	15,48	70,36
GINEDP 125AL... /...	16,59	75,43

EXTERNAL ANGULAR JUNCTION

Article	€/Pc
AEDDP 10AL...	19,50
AEDDP 125AL...	20,00

INTERNAL ANGULAR JUNCTION

Article	€/Pc
AICDP 10AL...	21,00
AICDP 125AL...	21,50

EMBOSSED COLOURS

EMBOSSED			
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLOURS ON DEMAND

EMBOSSED		SEMIGLOSSY	
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)
		E - Beige (1019)	T - Dark brown (8019)

STONE LINE - COLOURS ON DEMAND

SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyivory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragraj	SL08 - Stone antradark	SL09 - Stone bronze	SL12 - Stone black
SL13 - Stone oyster grey	SL14 - Stone taupe grey	SL15 - Stone grey smoke	SL16 - Stone grey gun	SL17 - Stone tobacco	SL18 - Stone white cement				

= News 2024

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROTERRACE ECO is a natural aluminium edging profile designed to protect the edges of the tiles laid on terraces and balconies. The profile is provided with a punched flange that ensures its fixing to the support. The front side of the profile protects the tile edges and is equipped with grooves that facilitate the grout grip. Thanks to its ease of application **PROTERRACE ECO** is a much sought after profile. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE ECO

ALUMINIUM, VARNISHED ALUMINIUM




NATURAL ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pce
⊕ PTEE 08AN	8	5,50	14,85
⊕ PTEE 10AN	10	6,20	16,74
⊕ PTEE 125AN	12,5	6,90	18,63

SILVER ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pce
⊕ PTEE 08AA	8	6,60	17,82
⊕ PTEE 10AA	10	7,30	19,71
⊕ PTEE 125AA	12,5	8,00	21,60

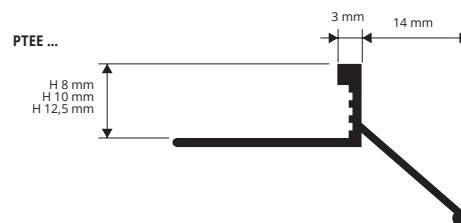

VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/ml	€/Pce
⊕ PTEE 08AL...	8	9,30	25,11
⊕ PTEE 10AL...	10	9,55	25,79
⊕ PTEE 125AL...	12,5	9,80	26,46

The code of the selected colour must be added to the article code.
E.g.: PTEE 10AL... (grey) PTEE 10ALGF.

ARTICLES NOT FOR SALE SINGLY


COLOURS




EMBOSSED COLOURS



COLOURS ON DEMAND



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

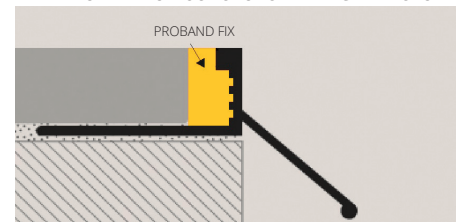


1. Choose "PROTERRACE ECO" according to the tile thickness.
2. Cut "PROTERRACE ECO" to the desired length and fix it to the support with nails.
3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
4. Lay the tiles, leaving about 5 mm between tiles and profile.
5. Seal the space between tiles and profile using **PROBAND FIX (PRBFX)**. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

PROSIDE WALK is a painted aluminium profile designed to protect the edges of tiles placed on sidewalks. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROSIDE WALK

VARNISHED/COATED ALUMINIUM

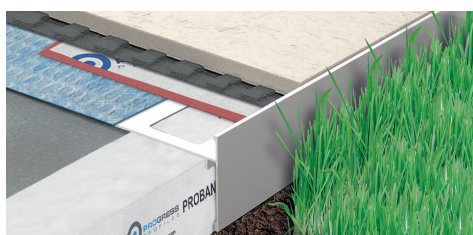


VARNISHED EMBOSSED ALUMINIUM


bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (PSDWK 10AL... 10 Pcs - 27 lm)

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80	21,22	57,29
PSDWK 125AL...	12,5	45	80	21,56	58,21
PSDWK 15AL...	15	45	80	21,87	59,05
PSDWK 20AL...	20	45	80	23,14	62,48

EMBOSSED COLOURS

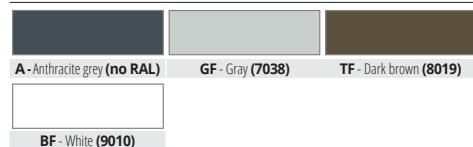

EMBOSSED COLOURS ON DEMAND



EXTERNAL CORNERS - pack. 10 Pcs


Article	h mm	H mm	L	€/Pc	€/Pack.
AEPSDWK 10AL.../10	10	45	80	22,86	228,60
AEPSDWK 125AL.../10	12,5	45	80	23,51	235,10
AEPSDWK 15AL.../10	15	45	80	24,82	248,20
AEPSDWK 20AL.../10	20	45	80	26,69	266,90

JOINTS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack.
GINSDWK ...AL.../10	10/125/15/20	6,53	65,30

Choose the desired height and finish.
E.g.: 10 mm joint with finish A - GINSDWK 10ALA/10


AEPSDWK external corner (welded)




GINSDWK joint



PSDWK 10AL / 125AL / 15AL / 20AL

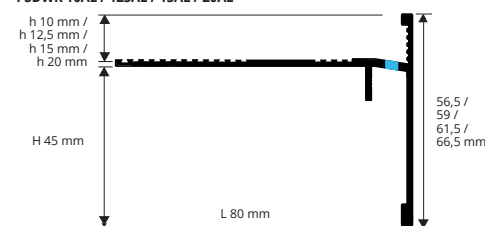

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

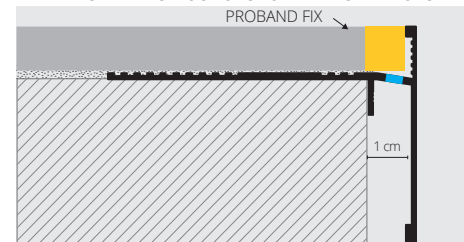

1. Choose PROSIDE WALK according to the tile thickness and desired colour.
2. Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed.
3. Fix the external corners with nails.
4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with **PROBAND FIX (P.186)**. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PSDWK 10ALGF (seaside) = PSDWK 10ALGFS
price for seaside treatment +50% on the gross price.

⊕ = News 2024


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PRO TERRACE PCG


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

PRO TERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PRO TERRACE PCG** a much sought after and easy to lay profile. The product is also available on request in **BENDABLE VERSION**

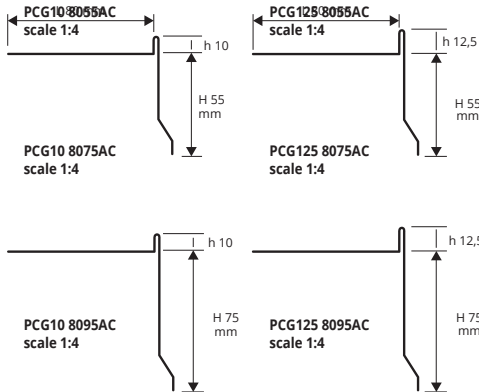

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm	€/lm	€/Pc
PCG10 8055AC	10 x 55 x 80	34,43	92,96
PCG10 8075AC	10 x 75 x 80	38,19	103,11
PCG10 8095AC	10 x 95 x 80	42,78	115,51
PCG125 8055AC	12,5 x 55 x 80	34,74	93,80
PCG125 8075AC	12,5 x 75 x 80	38,58	104,17
PCG125 8095AC	12,5 x 95 x 80	42,92	115,88



AEPG external corner (welded)




GING joints

EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPG10 55AC/75AC/95AC/10	57,50	575,00
AEPG125 55AC/75AC/95AC/10	57,50	575,00

* Corners and joints of the on demand profiles are also on demand

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

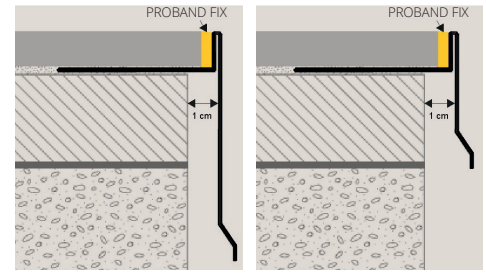

1. Choose "PRO TERRACE PCG" according to the tile thickness. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PRO TERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with **PROBAND FIX (P.186)**.

PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;


JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GING10 55AC/75AC/95AC/10	7,35	73,50
GING125 55AC/75AC/95AC/10	7,35	73,50

PRO TERRACE PCG

VARNISHED/COATED ALUMINIUM

PRO TERRACE PCG is an edging profile designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support and which is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PRO TERRACE PCG** a much sought after and easy to lay profile. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**

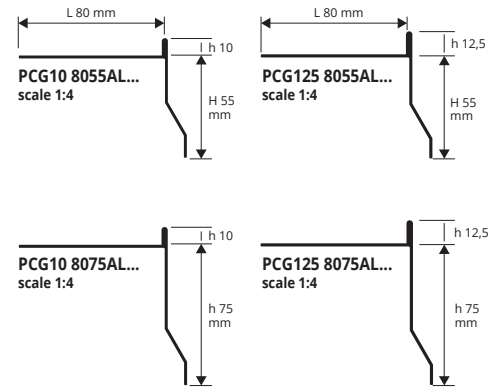


VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm	€/lm	€/Pc
PCG10 8055AL...	10 x 55 x 80	21,50	58,05
PCG10 8055ALG	10 x 55 x 80	21,50	58,05
PCG10 8075AL...	10 x 75 x 80	24,50	66,15
PCG10 8075ALG	10 x 75 x 80	24,50	66,15
PCG10 8095AL...	10 x 95 x 80	27,50	74,25
PCG10 8095ALG	10 x 95 x 80	27,50	74,25
PCG125 8055AL...	12,5 x 55 x 80	22,75	61,43
PCG125 8075AL...	12,5 x 75 x 80	25,25	68,175
PCG125 8095AL...	12,5 x 95 x 80	28,25	76,275

Available in the colours: BF - White, GF - Grey, A - Anthracite grey, TF (G only PCG10 8055ALG), EF - C - B - G - T - E on demand. The code of the selected colour must be added to the article code. E.g.: PCG10 8055AL... (white) PCG10 8055ALB.

EXEMPLES OF LAYING (for laying instructions, see above)

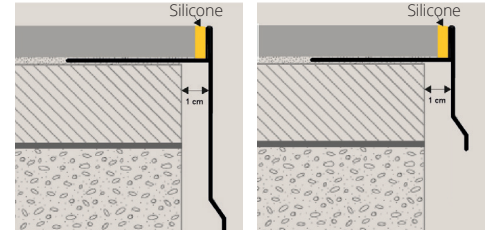

EXTERNAL CORNERS - pack. 10 Pcs


Article	€/Pc	€/Pack.
AEPG10 55AL.../75AL.../95AL.../10	32,60	326,00
AEPG125 55AL.../75AL.../95AL.../10	32,60	326,00

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GING10 55AL.../75AL.../95AL.../10	6,44	64,40
GING125 55AL.../75AL.../95AL.../10	6,44	64,40

HOW TO REQUEST SEASIDE TREATMENT


When placing your order please add S to the article's number
Example: PCG10 8055ALGF (seaside) = **PCG10 8055ALGFS**
price for seaside treatment +50% on the gross price.



AEPG external corner (welded)



GING joints

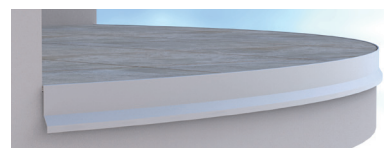

Also available in curvable version

COLOURS

EMBOSSÉD				SEMIGLOSSY
BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)	G - Grey (7038)

COLOURS ON DEMAND

GOFFRATI		SEMIGLOSSY			
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

* Corners and joints of the on demand profiles are also on demand

News 2024

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROTERRACE PC is a perimeter profile in stainless steel AISI 304/1.4301-V2A designed to protect the screed on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION**.

PROTERRACE PC


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

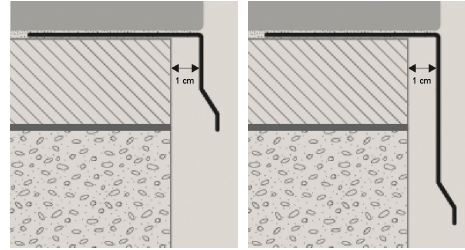

PC 8055AC
scale 1:2

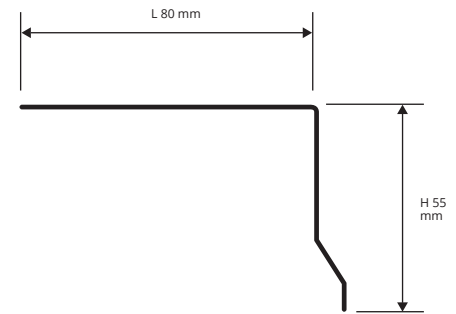

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	L x H mm	€/lm	€/Pc
PC 8055AC	80 x 55	32,52	87,80

1. Choose "PROTERRACE PC" according to the desired height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

EXTERNAL CORNERS - pack. 10 Pcs


Article	€/Pc	€/Pack.
AEPC 55AC	57,32	573,20

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINC 55AC	8,05	80,50

* Corners and joints of the on demand profiles are also on demand

AEPC external corner (welded)



GINC joints




PROTERRACE PC is a painted aluminium perimeter profile designed to protect the screed on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**.

PROTERRACE PC


VARNISHED/COATED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

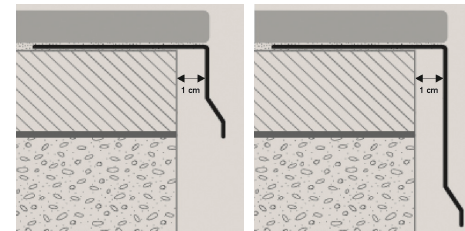

PC 8055AL
scale 1:2

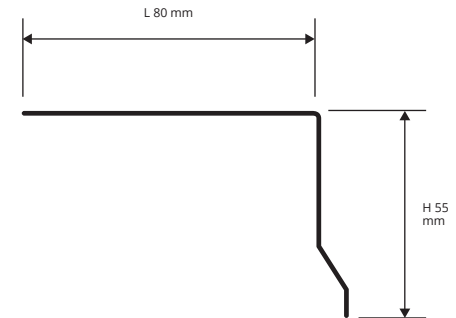

VARNISHED/COATED ALUMINIUM - bar length 2,7 lm
pack. 5 Pcs - 13,5 lm

Article	L x H mm	€/lm	€/Pc
PC 8055AL...	80 x 55	21,53	58,13

The code of the selected colour must be added to the article code. E.g.: PC 8055AL... (white) PC 8055ALB.

1. Choose "PROTERRACE PC" according to the desired colour and height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPC 55AL...	31,50	315,00

The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

* Corners and joints of the on demand profiles are also on demand

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINC 55AL...	6,09	60,90

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PC 8055ALGF (seaside) = **PC 8055ALGFS**
price for seaside treatment +50% on the gross price.

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)


EMBOSSED COLOURS ON DEMAND

EF - Beige (1019)	C - Corten	TF - Dark brown (8019)

SEMIGLOSSY COLOURS ON DEMAND

B - White (9010)	G - Grey (7038)	T - Dark brown (8019)
E - Beige (1019)		

AEPC external corners (welded)




GINC joints




PROTERRACE UNDER EDGE L


VARNISHED ALUMINIUM

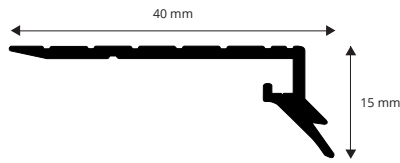

EXAMPLES AND INSTALLATION INSTRUCTIONS

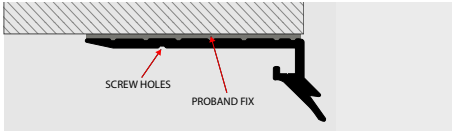


INSTALLATION ON LOWER EDGES OF TERRACES AND BALCONIES:
 1. Choose proterrace under edge l according to the desired colour. 2. Cut proterrace under edge l to the required size and secure it with proband fix and screws to the substrate taking care to leave 2 mm between two adjacent bars 3. Fix the joints by gluing them with proband fix.

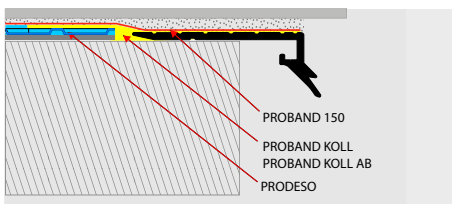

INSTALLATION UNDER TILES OR MARBLES:
 1. Choose proterrace under edge l according to the desired colour. 2. Cut proterrace under edge l to the required size and fix it with nails to the substrate taking care to leave 2 mm between two adjacent bars. 3. Apply the desired waterproofing system. 4. Lay the flooring. 5. Fix the joints with proband fix.

PROTERRACE UNDER EDGE L is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies, or can be installed as a terminal of lower edges of outdoor terraces with drip function and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

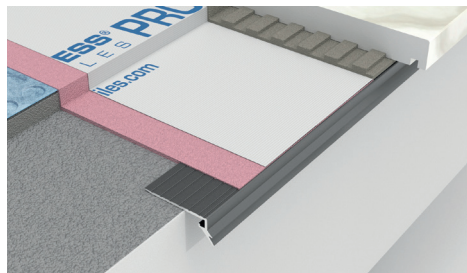

PROTERRACE UNDER EDGE L Varnished aluminium
 Bar length 2.7 Lm - pack 20 pcs - 54 LM

Article	H mm	€/ml	€/Pc
PTUEL...	15	16,54	44,66

CAPSULES
 Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
CPPTUE...S (left)	15,44	30,88
CPPTUE...D (right)	15,44	30,88



JOINTS
 Varnished aluminium

Article	€/pack. 2 Pcs	€/pack. 10 Pcs
GINPTUE...	11,03	49,61

END CAPS
 Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
TPPTUE...S (left)	5,51	11,02
TPPTUE...D (right)	5,51	11,02

STANDARD COLOURS

BF - Embossed white (9010)	GF - Embossed grey (7038)	AN - Natural aluminium
----------------------------	---------------------------	------------------------



GINPTUE...



CPPTUE...S



CPPTUE...D



TPPTUE...S




TPPTUE...D

GAMMA COLORI A RICHIESTA


GOFFRATI				SEMILUCIDI			
E - Beige (1019)	C - Corten	A - Anthracite grey (no RAL)	TF - Dark brown (8019)	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

PROTERRACE UNDER EDGE C

VARNISHED ALUMINIUM




EXAMPLES AND INSTALLATION INSTRUCTIONS

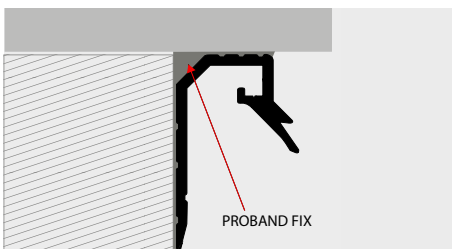

INSTALLATION UNDER TILES OR MARBLES:
 1. Choose proterrace under edge c according to the desired colour; 2. Cut proterrace under edge c to the required size; 3. Glue the profile to the structure with proband fix and secure it with screws, taking care to leave 2 mm between two adjacent bars; 4. Attach the joints with proband fix.

PROTERRACE UNDER EDGE C is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

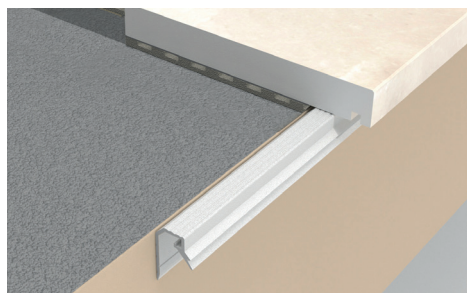

PROTERRACE UNDER EDGE C Varnished aluminium
 Bar length 2.7 Lm - pack 20 pcs - 54 LM

Article	H mm	€/ml	€/Pc
PTUEC...	15	16,76	45,25

CAPSULES
 Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
CPPTUE...S (left)	15,44	30,88
CPPTUE...D (right)	15,44	30,88



JOINTS
 Varnished aluminium

Article	€/pack. 2 Pcs	€/pack. 10 Pcs
GINPTUE...	11,03	49,61

END CAPS
 Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
TPPTUE...S (left)	5,51	11,02
TPPTUE...D (right)	5,51	11,02

STANDARD COLOURS

BF - Embossed white (9010)	GF - Embossed grey (7038)	AN - Natural aluminium
----------------------------	---------------------------	------------------------



GINPTUE...



CPPTUE...S



CPPTUE...D



TPPTUE...S



TPPTUE...D

GAMMA COLORI A RICHIESTA

GOFFRATI				SEMILUCIDI			
E - Beige (1019)	C - Corten	A - Anthracite grey (no RAL)	TF - Dark brown (8019)	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. **LATERAL AND VERTICAL DRAIN KIT** ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS


Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	158,49
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	133,13



PROSHOWER DRAIN LATERAL KIT PSHLDK



PROSHOWER DRAIN VERTICAL KIT PSHVDK

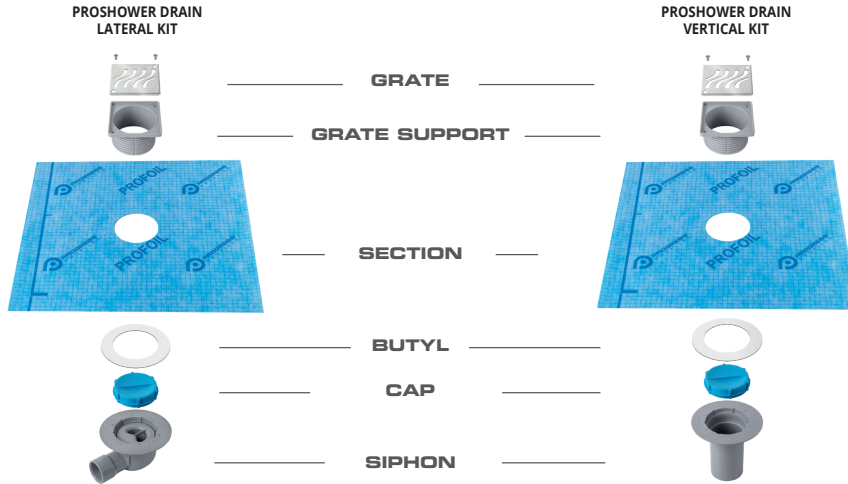

AREA OF USE

- Use - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.

© 2024. All rights reserved by Progress Profiles. Printed in Italy

PROFILES FOR TERRACES

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PRODRIP

PERIMETRAL DRAIN

PERIMETER DRAIN

pack. per pallet = 192

Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4	24,82	99,28

AREA OF USE

- Use - To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.

