


An interpretation of:
**Museum of the Future, Shaun Killa,
The Frame, Fernando Domis, DUBAI (United Arab Emirates), 2018**

MEMBRANE AND PANELS



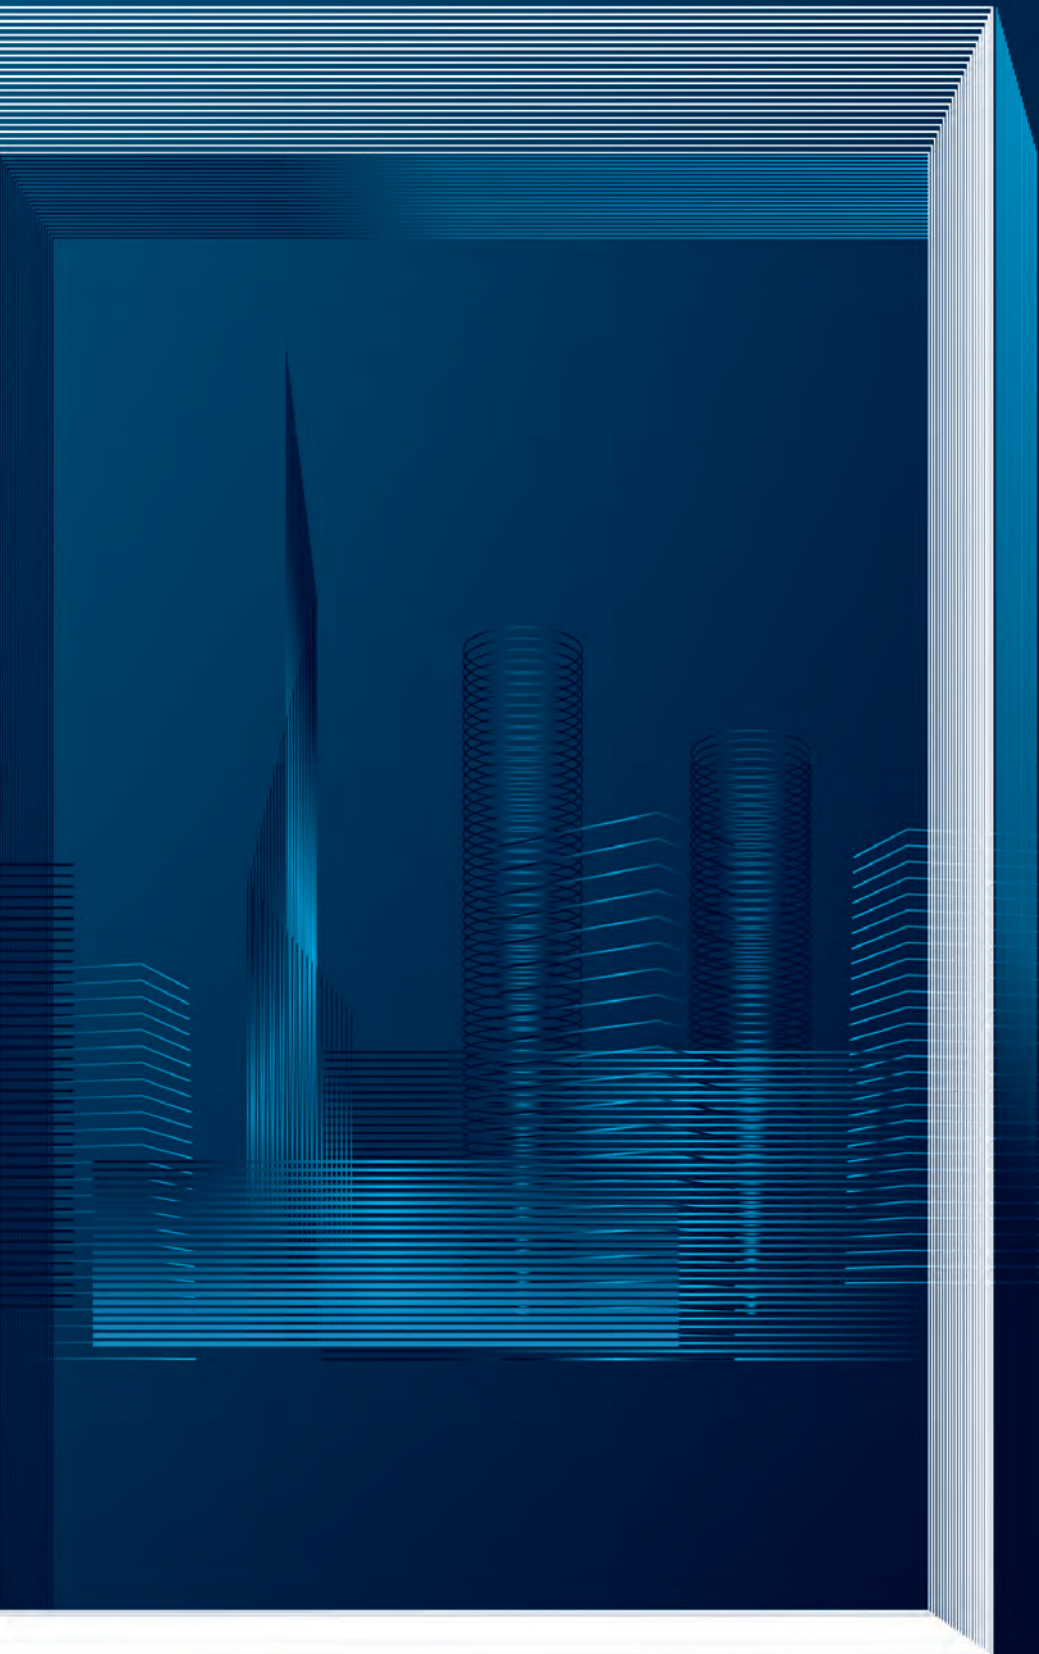

PRODESO® DRAIN 8 SYSTEM

WEBSITE



PATENTED

MEMBRANE AND PANELS



PATENTED

102018000005884

© 2021. All rights reserved by Progress Profiles. Printed in Italy

Discover Prodeso® Drain 8!! The essential drainage and waterproofing function guaranteed by the most advanced system in the world.

PRODESO® DRAIN 8 is a draining, uncoupling and waterproofing patented membrane, with a total thickness of 8 mm, which can be installed even on not perfectly cured supports. The “air chamber” below the floor drains the water that has penetrated below it, it facilitates a fast drying of the adhesive and drastically reduces the rise of triacetates and the appearance of efflorescence.

The system, ideal for a correct laying on terraces and balconies even of large slabs, is completed with a band in polyethylene and elastic polypropylene and with a bicomponent waterproof adhesive. Quick and easy to install, the PRODESO® DRAIN 8 is very versatile and guarantees long life for outdoor flooring.

Functions



UNCOUPLING




WATERPROOFING



VAPOUR MANAGEMENT



DRAINAGE



MICRO VENTILATION

PRODESO® DRAIN 8 MEMBRANE is a waterproofing, uncoupling and draining membrane with 5 layers ideal for outdoor environments.


PRODESO® DRAIN 8 SYSTEM



5 LAYERS MEMBRANE

PRODESO® DRAIN 8 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll x Pallet	€/m	€/Roll	€/Pallet
PDESDR 151	1	15	8	8	24,95	374,25	2994,00

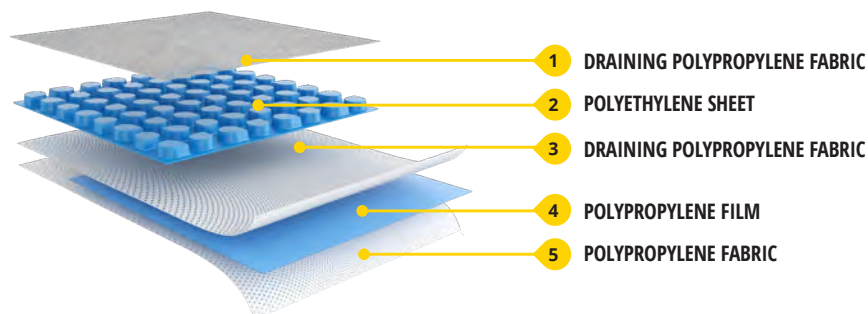

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 250

ROLLS IN HDPE AND PP

PROBAND 250

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll x Pack	€/m	€/Roll	€/Pallet
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250



© 2024. All rights reserved by Progress Profiles. Printed in Italy

MEMBRANE AND PANELS

PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB

Article	Kg/Pack	Pack/pallet	Kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLAB	15	27	405	11,25	168,75	4556,25

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250




Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

PRE-WELDED CORNERS

PRE-WELDED CORNERS

Article	H mm	L mm	Pcs/Pack	€/Pc	€/Pack
PRBI	60	120	10	8,23	82,30
PRBE	60	120	10	8,23	82,30

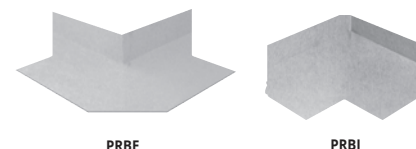

Adhesive junction tape.

PRODESO® SOUND TAPE

PRODESO® SOUND TAPE - height 50 mm

Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box
PDSNDTP 550	50	6	36	12,36	74,16	444,96




= News 2024

Prices are referred to whole packs.



PRODESO® DRAIN 4 SYSTEM

WEBSITE

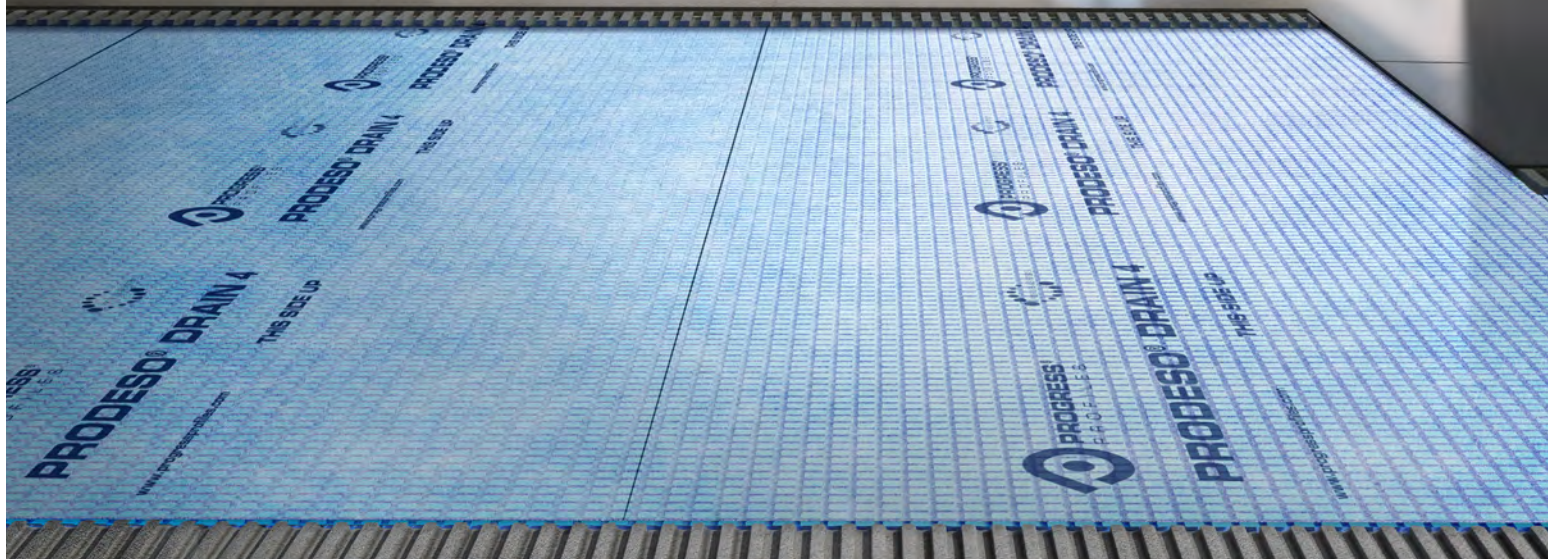

MEMBRANE AND PANELS

Certified

- 12004 - Adhesion to the Substrate
- 12004 - Adhesion to the Tiles
- 12004 - Resistance to Substrate shear
- 12004 - Resistance to Tile shear
- ASTM C627-18 - Robinson Test with Screed
- ASTM C627-18 - Robinson Test with Plywood
- ANSI A118.12 - Uncoupling
- UNI EN 12667:2002 - Heat Resistance

© 2021. All rights reserved by Progress Profiles, Printed in Italy

The essential micro-ventilation, drainage and uncoupling functions for a right internal installation of large size tiles.

PRODESO® DRAIN 4 is a uncoupling membrane which creates an "air chamber" below the floor favoring the the drainage of the water and the micro-ventilation. This "air chamber" guarantees a fast and smooth drying of the adhesive, even in case of large size tiles, and reduces

significantly efflorescence formation and triacetate rising in joints. The uncoupling and vapour management properties of PRODESO® DRAIN 4 guarantees the laying even in not perfectly cured supports. Easy and quick to install, PRODESO® DRAIN 4 has an overall thickness of only 4 mm.

Functions



UNCOUPLING



VAPOUR MANAGEMENT



DRAINAGE



MICRO VENTILATION



HEATING DISTRIBUTION

PRODESO® DRAIN 4 MEMBRANE is a 3-layers uncoupling and draining membrane ideal for indoor environments.



PRODESO® DRAIN 4 SYSTEM



3 LAYERS
MEMBRANE

PRODESO® DRAIN 4 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll x Pallet	€/m	€/Roll	€/Pallet
PDES DR 251	1	25	4	9	20,90	522,50	4702,50

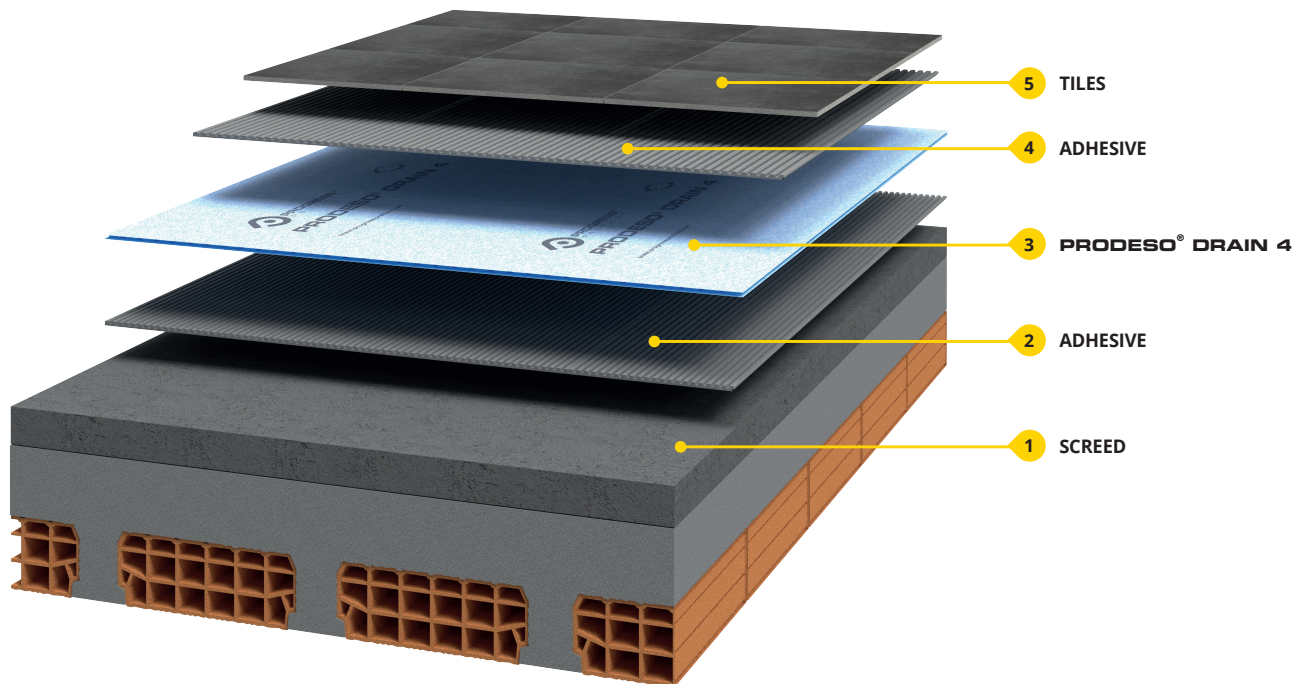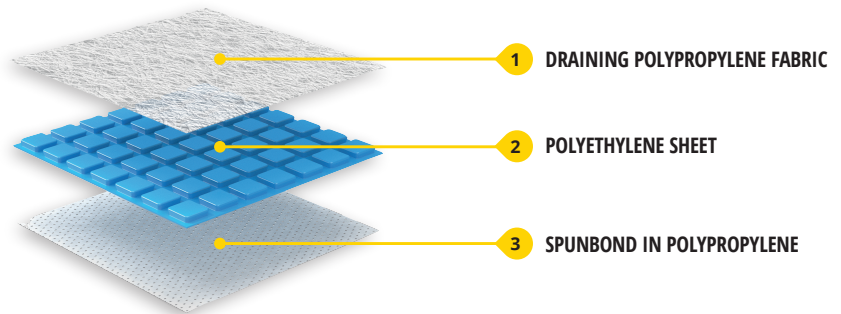

MEMBRANE AND PANELS

© 2024. All rights reserved by Progress Profiles. Printed in Italy



PRODESO® MEMBRANE SYSTEM



PATENTED




PATENTED
003368984

MEMBRANE
AND PANELS


© 2021. All rights reserved by Progress Profiles, Printed in Italy

Uncoupling and waterproofing system, particularly good for problematic screeds substrates.


PRODESO® MEMBRANE SYSTEM SECTION

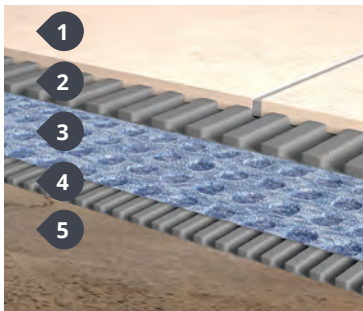

1. Ceramic / Stone or Porcelain Tiles
2. Adhesive
3. PRODESO®
4. Adhesive
5. Screed, Plywood, OSB etc.

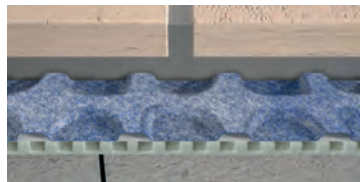


UNCOUPLING

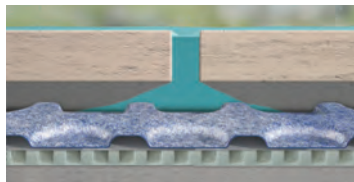


WATERPROOFING



SUPPORT/LOAD DISTRIBUTION

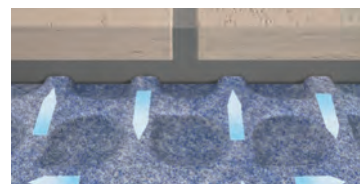

VAPOR AND MOISTURE MANAGEMENT

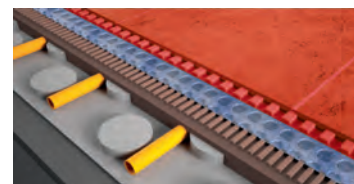

FLOOR HEATING DISTRIBUTION

It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. **PRODESO®** ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

PRODESO® MEMBRANE

UNCOUPLING & WATERPROOFING
MEMBRANE

PRODESO® MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDES 3530/EN	1	30	3,5	8	19,29	578,70	4629,60
PDES 3505/EN	1	5	3,5	40	22,46	112,30	4492,00

L 5m

L 30m



WHY USE PRODESO® MEMBRANE SYSTEM

Time Efficient: PRODESO® Membrane reduces drastically the installation times because from the installation of the membrane up to the laying of flooring you can work without interruption.


Flexible: it is suitable for every types of subfloor including very large surfaces both indoor and outdoor.

Safe: it is suitable for substrates with cracks as it does not transmit tension of the substrate to the tile coverings and vice versa. It is also suitable on substrates not perfectly cured since it allows the vapour management.

WARNINGS

Do not lay tiles with a size less than 5 x 5 cm. The technical and application details can be found in the **PRODESO® MEMBRANE SYSTEM** brochure. For other informations not described in the brochure **PRODESO® MEMBRANE SYSTEM**, refer to the technical department.

H 3,5 mm



PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 150/250

ROLLS IN HDPE AND PP

PROBAND 150/250

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pack.
PRBPE 1507	150	7,5	0,42	16	5,70	42,75	684,00
PRBPE 1530	150	30	0,42	6	4,18	125,40	752,40
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20



For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

- **Use** - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL**, **PRODESO® MEMBRANE SYSTEM** and **PRODESO® HEAT/GRIP SYSTEM**
- **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department

RECOMMENDED ADHESIVES FOR THE LAYING OF PRODESO® MEMBRANE (grey color)

KERAKOLL The GreenBuilding Company H40 NO LIMITS H40 REVOLUTION H40 EXTREME	LITOKOL HIGH PERFORMANCE BUILDING PRODUCTS SUPERFLEX K77 POWERFLEX K50 LITOSTONE K99	index A SIKA COMPANY FLEXBOND C2S1 FLEXBOND LIGHT C2S1 WETBOND RAPID C2F	Grigolin evoluzioni costruttive GRIGOKOLL TEX GRIGOKOLL MAX GRIGOKOLL VELOX	Jika CERAM 255 STARFLEX CERAM 255 EASY S1 CERAM 270 MULTIFLOW	Weber SAINT-GOBAIN ULTRAGRES 400 ULTRAGRES FLEX ULTRAGRES FAST	PCI Für Bau-Profis PERICOL R-FLEX PERICOL EXTRA FLEX PERICOL FLEX	kedil prodotti chimici per l'edilizia KEDIFLEX S1 KEDYTOP FAST MAXI
LATICRETE 335 MAXI S 335 SUPER FLEX 325 RAPID FL	ARDEX ARDEX X 78 ARDEX X 90 OUTDOOR ARDEX AF 495	MUREXIN MUREFLEX MFK 45 ADESIVO FBS 75 MAXIMO M 41	Opera POSSA LA QUALITÀ RT UNIVERSAL RT HI TECH RT RAPID FLEX	sey SEYFLEX S1 SEYULTRA T TIXOSEY	imo KRISTAL C2TE EXTRA C2S1	FASSA BORTOLO QUALITÀ PER L'EDILIZIA AZ 59 RAPID MAXI SPECIAL ONE	CERMIX SOLUTIONS EXPERTES POUR LA CONSTRUCTION CERMIPLUS 2.0 CERMIPLUS XL FLEX 2.0
COLMEF NEOFIL F10 TECH S1 SILIKOLL FLEX S1 NEOFIL F50 RAPID	AQUILAPREM FORTEM MAXIM	Benfer BENFERFLEX+S1 BENFERFLEX C2 BENFERFLEX + FAST-S1	CarCol Adesivi e prodotti speciali per l'edilizia F.55 CERMONO PLUS F.55 CERFIX F.55 CERMONO RAPIDO	ADESITAL ADESIVI E SISTEMI PER COSTRUIRE EXTRA 30 MAXI ADEFLEX GREEN S1 EXTRA 30 POWER	codex POWER CX 3 POWER CX 7 POWER RX 6 TURBO	MAPEI KERAFLEX EASY ULTRALITE S1 KERAFLEX MAXI S1	



PRODESO® HEAT GRIP 8 SYSTEM

INSTRUCTION VIDEO



PATENTED

PATENTED

UA2016A002209
 EP3225763 A1
 003067388
 2696795
 CN 107268933 A
 HK1238695
 CA 2,935,062
 US 9,726,383 B1
 US, 10,502,434 B2
 US 10,859,274 B2
 US 10,215,423
 US D818,615S
 US D818,616S
 US D818,617S
 US D832,467S
 US D841,837S
 US D872,901S
 US D874,028S
 DESIGN PATENT
 Patent pending

MEMBRANE AND PANELS

A New evolution with the goal of flexibility, innovation and energy efficiency

The system consists of three elements: **PRODESO® HEAT GRIP 8 MEMBRANE**, **PRODESO® HEAT GRIP 8 CABLE** and **PRODESO® HEAT GRIP 8 THERMOSTAT KIT**. The polyethylene membrane, with uncoupling, waterproofing and vapour management function, has a thickness of only 8.5 mm and is provided below with a non-woven polypropylene thermowelded fabric that ensures the attachment to the support. The new shape of the membrane, in addition to


ensuring a perfect anchoring of the heating cable, ensures a very high tear resistance on the floor. The latest generation cables consist of resistors of 60 cm long in series. In case of cable damage then stops working the damaged resistor and not the whole cable. The thermostat, of the latest generation, interfaces with Android and Apple devices; this allows you to program all its adjustments and settings even remotely using a WiFi network.

Functions

- Only 8.5 mm thickness
- Higher crack-bridging ability
- Uncoupling
- Waterproofing
- Vapour management ducts
- Load distribution
- New constant power cable
- Remote controlled thermost




UNCOUPLING



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT



LOAD DISTRIBUTION

© 2021 All rights reserved by Progress Profiles, Printed in Italy

PRODESO® HEAT GRIP 8 MEMBRANE - Waterproofing and uncoupling studded membrane combined with electric heating cables. (Thickness 8,5 mm).

PRODESO® HEAT GRIP 8 SYSTEM

PRODESO® HEAT GRIP MEMBRANE 8

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESHG8 131	1	13	8,5	9	22,50	303,75	2733,75
PDESHG8 451	1	4,5	8,5	23	24,50	110,25	2535,75 *

L 4,5m

L 13m




it is a constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT GRIP 8 MEMBRANE**. The cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT GRIP 8 CABLE

PRODESO® HEAT GRIP 8 CABLE

Article	Cable Length (m)	Heated surface on the WALL (6,2 cm)	Heated surface on the FLOOR (9,3 cm)	Total Power W	€/Roll
PDHG8CB 20	19,8	1,19 m ²	2,00 m ²	250 W	220,00
PDHG8CB 26	25,8	1,55 m ²	2,50 m ²	325 W	260,00
PDHG8CB 31	30,8	1,83 m ²	3,00 m ²	385 W	300,00
PDHG8CB 36	36	2,14 m ²	3,50 m ²	450 W	325,00
PDHG8CB 40	40,2	2,38 m ²	4,00 m ²	500 W	355,00
PDHG8CB 46	46,2	2,74 m ²	4,50 m ²	575 W	410,00
PDHG8CB 52	52,2	3,10 m ²	5,00 m ²	650 W	460,00
PDHG8CB 62	61,8	3,69 m ²	6,00 m ²	775 W	495,00
PDHG8CB 72	72	4,29 m ²	7,00 m ²	900 W	570,00
PDHG8CB 82	82,2	4,88 m ²	8,00 m ²	1025 W	660,00
PDHG8CB 94	94,2	5,60 m ²	9,00 m ²	1175 W	750,00
PDHG8CB 104	103,8	6,19 m ²	10,00 m ²	1300 W	825,00
PDHG8CB 132	132	7,86 m ²	12,50 m ²	1650 W	960,00
PDHG8CB 158	157,8	9,40 m ²	15,00 m ²	1975 W	990,00



PRODESO® HEAT GRIP 8 CABLE - 450 M

Article	Diameter (mm)	Length ml	Power w/ml	Power supply V	€/roll
PDHGCB450	6,5	450 M	12,5 W	230 V	2723,63

It is composed of a Wi-Fi digital thermostat, a flush-mounting box, corrugated pipe, two floor temperature sensors and clips to fix the cable.

PRODESO® HEAT GRIP 8 THERMOSTAT


PRODESO® HEAT GRIP 8 DIGITAL THERMOSTAT - TOUCH SCREEN - WI-FI

Article	€/Kit
PDHTSMWTK	220,00
PDHTSMWTKW	220,00



DIGITAL WIFI THERMOSTAT

Article	€/Kit
PDHTSMWT 230	190,00
PDHTSMWTW 230	190,00



PRODESO® HEAT GRIP 8 SYSTEM OPTIONAL

ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO® HEAT GRIP 8 e PRODESO® HEAT GRIP 5.


Article	L cm	Pc/Pack	€/Pc
PSC	15	1	86,20



PROECOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. 2 Pcs

Article	Thick. x H mm	Lm/Roll	€/Lm	€/Pack
PEF 550A	5 X 50	25	2,10	52,50



PRODESO® HEAT GRIP 8 CABLE KIT

Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
PDHGCK110	1	10	14,57
PDHGCK550	5	50	71,00



PRODESO® HEAT GRIP 8 POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
PDHGCBF	2,5	17,76	44,40



PRODESO® HEAT GRIP 8 CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT GRIP 8 MEMBRANE (40 mm x 5 mm)

Article	Pcs/Pack	€/Pc	€/Pack
PCBLF	200	1,58	316,00





PRODESO® HEAT GRIP 5 SYSTEM

INSTRUCTION VIDEO



PATENTED

PATENTED

002748822
 EP 3,183,505 B1
 US 8,176,694 B2
 US 9,188,348 B2
 US 9,416,979 B2
 US 9,518,746 B2
 US 9,625,163 B2
 US 9,719,265 B2
 US 9,777,931 B2
 US 10,107,505 B2
 US 10,006,644 B2
 US 10,215,423 B2
 US 10,408,469 B2
 US 10,712,020 B2
 US 10,739,016 B2
 Patents Pending

MEMBRANE AND PANELS

A World of warmth and comfort in harmony with the nature.


The electric underfloor and wall heating system **PRODESO® HEAT GRIP 5 SYSTEM**, designed, manufactured and patented by Progress Profiles, is an innovative system that allows to obtain in a short time and at low cost a pleasantly warm and extremely comfortable environment. The system is applied using normal cementitious adhesives and thanks to its uncoupling and waterproofing properties can be installed on cracked substrates and also during shrinkage. Thanks to the latest generation Wi-Fi thermostat, the system can be programmed daily even

remotely and this allows you to optimize comfort and reduce consumption. Easy and quick to install in any environment, it has an overall thickness, including the adhesive, of only 7 mm and does not require any maintenance over time. An intelligent technology and a responsible choice that puts in the foreground the values of eco-sustainability and energy saving in tune with the trends of contemporary architecture and the most advanced home automation. A world of warm well-being in harmony with nature.

Functions




UNCOUPLING / CRACK ISOLATION



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT



LOAD DISTRIBUTION

© 2021. All rights reserved by Progress Profiles. Printed in Italy

PRODESO® HEAT GRIP 5 MEMBRANE is an uncoupling membrane, waterproofing in polyethylene, equipped with reliefs that allow the attachment of the electric heating cable.


PRODESO® HEAT GRIP 5 SYSTEM

PRODESO® HEAT GRIP 5 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESHG5 151	1	15	5,5	9	21,50	322,50	2902,50
PDESHG5 051	1	5	5,5	30	23,50	117,50	3525,00

L 5m

L 15m



it is a constant power electric heating cable to be embedded between the reliefs of PRODESO® HEAT GRIP 5 MEMBRANE. The cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT GRIP 5 CABLE

PRODESO® HEAT CABLE

Article	Cable Length (m)	Heated surface on the WALL (6,2 cm)	Heated surface on the FLOOR (9,3 cm)	Total Power W	€/Roll
PDHG5CB 12	12,07	0,70 m ²	1,1 m ²	150 W	185,00
PDHG5CB 17	17,66	1,00 m ²	1,6 m ²	225 W	220,00
PDHG5CB 23	23,77	1,40 m ²	2,2 m ²	300 W	245,00
PDHG5CB 29	29,87	1,80 m ²	2,7 m ²	375 W	290,00
PDHG5CB 35	35,97	2,20 m ²	3,3 m ²	450 W	335,00
PDHG5CB 41	41,56	2,50 m ²	3,8 m ²	525 W	370,00
PDHG5CB 47	47,67	2,90 m ²	4,4 m ²	600 W	425,00
PDHG5CB 53	53,77	3,30 m ²	5,0 m ²	675 W	470,00
PDHG5CB 59	58,87	3,70 m ²	5,5 m ²	750 W	505,00
PDHG5CB 71	71,57	4,40 m ²	6,6 m ²	900 W	580,00

It is composed by a digital or analogic programmable thermostat, flush-mounting box, corrugated pipe and two floor temperature sensors.

PRODESO® HEAT GRIP 5 THERMOSTAT

PRODESO® HEAT GRIP 5 DIGITAL THERMOSTAT - TOUCH SCREEN - WI-FI

Article	€/Kit
PDHTSMWTK	220,00
PDHTSMWTKW	220,00

DIGITAL WIFI THERMOSTAT

Article	€/PC
PDHTSMWT 230	190,00
PDHTSMWTW 230	190,00

PRODESO® HEAT GRIP 5 THERMOSTAT KIT - ANALOGIC

Article	€/Kit
PDHTSK 230V	175,00

ANALOGIC THERMOSTAT

Article	€/Kit
PDHTSM 230	140,00

PRODESO® HEAT GRIP 5 SYSTEM OPTIONAL

ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pc/Pack	€/Pc
PSC	15	1	86,20

PROECOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. 2 Pcs

Article	Thick. x H mm	Lm/Roll	€/Lm	€/Pack
PEF 550A	5 X 50	25	2,10	52,50

PRODESO® HEAT GRIP 5 CABLE KIT

Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
PDHGCK110	1	10	14,57
PDHGCK550	5	50	71,00

PRODESO® HEAT GRIP POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
PDHGCBF	2,5	17,76	44,40

PRODESO® HEAT GRIP 5 CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT GRIP 5 MEMBRANE (40 mm x 5 mm)

Article	Pc/Pack	€/Pc	€/Pack
PCBLF	200	1,58	316,00

PRODESO® HEAT GRIP 5 KIT SYSTEM

Floor and wall electric heating system kit, composed of 3 pieces: PRODESO® HEAT GRIP 5 MEMBRANE, PRODESO® HEAT GRIP 5 CABLE AND PRODESO® HEAT GRIP 5 THERMOSTAT KIT. The polyethylene membrane, with its uncoupling, waterproofing and vapour management properties, has a thickness of just 5.5 mm.




PRODESO® HEAT GRIP 5 SYSTEM

Wall and floor electric heating system

Article	mq membrane	Panels x kit	Cable	Power tot W	Thermostat kit	Wall heated surface (with a cable distance of 6,2 cm)	Floor heated surface (with a cable distance of 9,3 cm)	price € / kit
PDESHK 4	3,2	4	PDHCB 23	300	1	1,40	2,20	630,00
PDESHK 7	5,6	7	PDHCB 41	520	1	2,50	3,80	840,00
PDESHK 10	8,0	10	PDHCB 59	750	1	3,70	5,50	1040,00

heating cable PDHCB included in the kit

PRODESO® HEAT GRIP 5 THERMOSTAT KIT: digital touch screen thermostat, 2 temperature sensors, flush mounting box, flexible corrugated pipe.

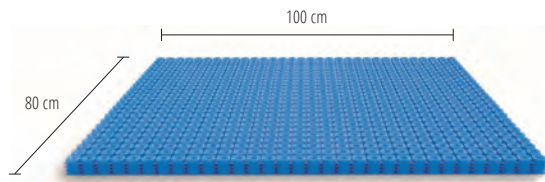

PRODESO® HEAT GRIP 5
MEMBRANE



PRODESO® HEAT GRIP 5
CABLE



DIGITAL TOUCH



PRODESO® HEAT GRIP 5 THERMOSTAT KIT




Uncoupling and waterproofing membrane in polyethylene with a thickness of 5.5 mm. The membrane is provided on top with pseudo-square reliefs which create channels for fixing the electric heating cable. On the back of the membrane there is a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring.

PRODESO® HEAT GRIP 5 STICK SYSTEM

PRODESO® HEAT GRIP 5 STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESHG5ST 151	1	15	5,5	9	24,50	367,50	3307,50
PDESHG5ST 051	1	5	5,5	30	26,50	132,50	3975,00

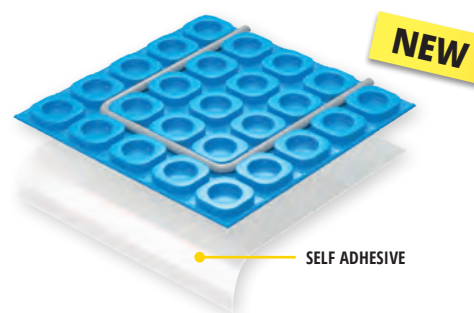

© 2024. All rights reserved by Progress Profiles. Printed in Italy

PRODESO® ECO is an uncoupling membrane, which allows vapour management and heat distribution with only 4 mm thickness. It is composed of a polyethylene sheet, with square base truncated pyramid cavities, to which a polypropylene non-woven fabric is thermowelded and ensures the membrane is bonded to the support. The uncoupling and vapour management features of PRODESO® ECO allow it to be laid even on not perfectly cured supports. Also available in self-adhesive version **PRODESO® ECO STICK**.

PRODESO® ECO / PRODESO® ECO STICK MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE


PRODESO® ECO MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESEC 3530	1	30	4	9	16,50	495,00	4455,00


PRODESO® ECO STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESECT 3530	1	30	4	9	19,50	585,00	5265,00

PRODESO® ECO




PRODESO® ECO
STICK



PRODESO® ECO

PRODESO® ECO
STICK

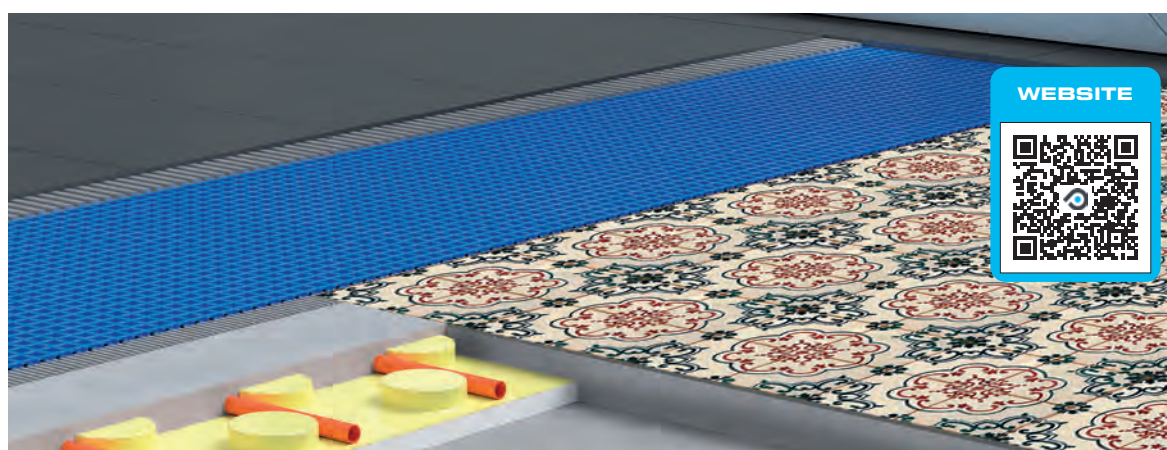


🕒 = News 2024

* = Production on demand with minimum quantity of 1000 lm Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

PREFORMED CORNERS

Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

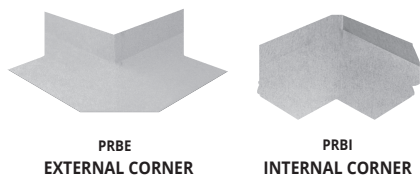

PRBE
EXTERNAL CORNER

PRBI
INTERNAL CORNER

PREFORMED CORNERS

Article	H mm	L mm	Pc/Pack	€/Pc	€/Pack
PRBI	60	120	10	8,23	82,30
PRBE	60	120	10	8,23	82,30

Don't use - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents. adhesive.

PROBAND BU

BUTYLE TAPE

PROBAND BU is an adhesive tape in butyle provided on one side with non-woven polypropylene that guarantees high adhesion. use for the Realization of perimeter junctions in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic and metal on balconies, terraces and external surfaces of any size.



PROBAND BU

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Rolls/Pack	€/m	€/Roll	€/Pack
PRBBU 7515	75	15	1	8	3,91	58,65	469,20

WARNINGS: Don't use - On dirty, incoherent and wet surfaces.

PROBAND KOLL

SINGLE-COMPONENT WATERPROOF SEALANT

PROBAND KOLL is a single-component hygro-hardener adhesive for the sealing of PROBAND 150/250 on PRODESIO® MEMBRANE.



PROBAND KOLL

Article	Kg/Pack	Pack/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLN	7	98	686	10,97	76,79	7525,42

For the indicative consumption of proband koll during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESIO® MEMBRANE and PRODESIO® HEAT/GRIP MEMBRANE.



PROBAND KOLL AB

Article	Kg/Pack	Pack/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLAB	15	27	405	11,25	168,75	4556,25

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

- **use** - Balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.
- **Don't use** - as waterproofing sheet, to glue tiles and PRODESIO® family membranes, PROFOIL and PROFOIL PANEL.

PROBAND KOLL 1K

ONE-COMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL 1K - Red one-component hydrophobic adhesive for PROBAND 150 waterproof sealing with PRODESIO® family membranes. For indoor use



PRBK1KS

PRBK1KB

PROBAND KOLL 1K

Article	Kg/Pack	Box/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRBK1KS	25 KG (5 X 5 KG)	10	250	6,65	166,25	1662,50
PRBK1KB	5 KG	30	150	8,00	40,00	1200,00

Sold exclusively by the pallet.

PROBAND FIX

MOISTURE-CURE SEALANT

PROBAND FIX is a moisture-cure sealant with high adhesion and elasticity. It guarantees the adhesion of PROBAND 150/250 with aluminium frames, plastic and metal and between adjacent sheets of PROFOIL. Don't use On bitumen membranes. To seal proband with PRODESIO®.



MOISTURE-CURE SEALANT

pack. of 12 cartridges - B (white) - G (grey)

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	17,64	211,68
PRBFXG	290	17,64	211,68



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

Article	Pc/Pack	€/Pc
PRBFXGUN	1	352,60


PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE

CLOSED-CELL EXPANDED POLYETHYLENE WITH ADHESIVE - (PEF 550A - Pack 2 Pcs)

Article	Thick. x H mm	lm/roll	€/lm	€/Pack
PEF 550A	5 X 50	25	2,10	52,50
PEF 5100A	5 X 100	100	0,85	85,00



Adhesive junction tape for the membrane PRODESOSOUND

PRODESOSOUND TAPE

PRODESOSOUND TAPE - height 50 mm

Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box
PDSNDTP 550	50	6	36	12,36	74,16	444,96



PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	158,49
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	133,13

AREA OF USE

- **Use** - For the realization of drains on balconies, terraces and external surfaces of any size waterproofed with polymer-cement system and PRODESOSOUND MEMBRANE SYSTEM.
- **Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-



PROSHOWER DRAIN LATERAL KIT PSHLDK

PROSHOWER DRAIN VERTICAL KIT PSHVDK

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PRODRIP

SCARICO PERIMETRALE

PERIMETER DRAIN

pack. per pallet = 192






Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4	24,82	99,28

AREA OF USE

- **Use** - For the realization of perimeter drains on balconies, terraces and external surfaces of any size waterproofed with liquid sheaths and membranes of the PRODESOSOUND family.
- **Don't use** - With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents. Consult the data sheet prior to application in the case of special applications, we recommend that you consult the tech-

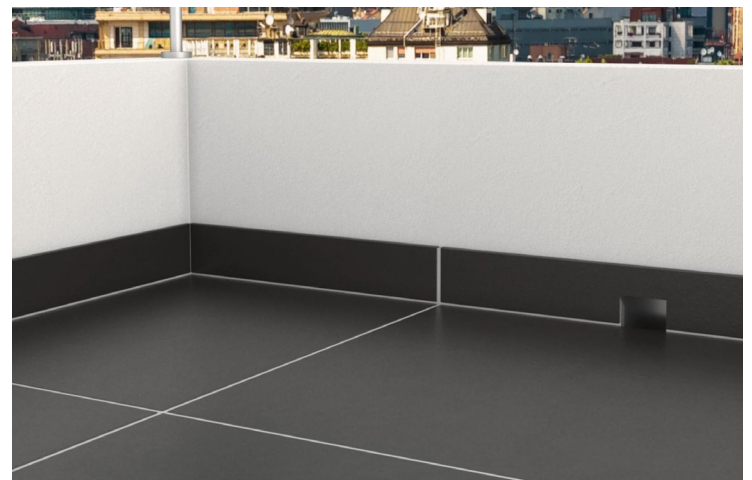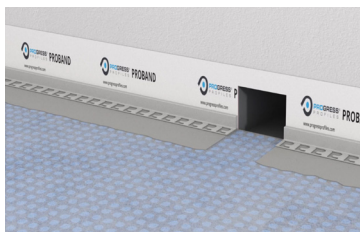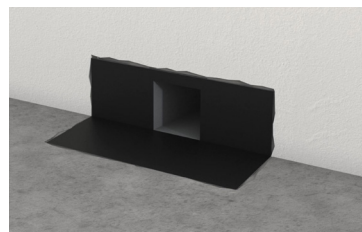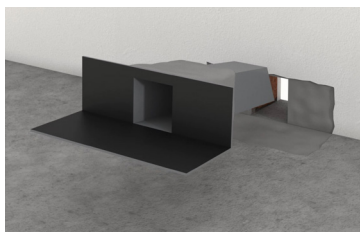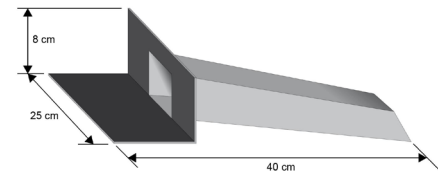

PRODESO® SOUND


UNCOUPLING AND SOUNDPROOF
MEMBRANE

It is a membrane in high density polyethylene. It is covered on top with a polypropylene spunbond and on the back with a non-woven fabric in polypropylene. Both of them are thermo-welded to the polyethylene sheet to guarantee the adhesion of the membrane with the adhesive. PRODESO® SOUND is an uncoupling and soundproof membrane, with a thickness of 2,3 mm, which does not require any expansion joints before tiling with ceramic or natural stone. **PRODESO® SOUND** guarantees the laying of any flooring and the soundproofing up to 17dB in any indoor environment, even in the case of problematic supports and old tiles.

L 20m



H 2,3 mm



PRODESO® SOUND MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDSND 30	1	20	2,3	12	30,29	605,80	7269,60

AREA OF USE

- **Use** - Uncoupling and soundproof membrane also for cracked screeds. It can be laid on cement and gypsum based screed, old ceramic, natural stone floorings, concrete and wood structure. Very resistant to saline solutions, acids and alkalis, alcohol and oils. In case of particular products, contact our technical department.
- **Don't use** - On lightweight screeds not suitable for the laying of flooring. Do not lay with adhesives containing solvents.



SPEED

VERSATILITY

SOUNDPROOFING



LAYING
VIDEO



© 2021 All rights reserved by Progress Profiles. Printed in Italy

MEMBRANE
AND PANELS



PRODESO® SOUND STICK is an uncoupling and soundproofing membrane, with a thickness of 2.5 mm, composed of a high density polyethylene sheet to which two polypropylene nonwoven fabrics are heat-sealed. Due to its uncoupling properties, it is not necessary to respect any joint in the screed before the laying of tiles and natural stones. PRODESO® SOUND STICK guarantees an acoustic wave reduction from foot traffic up to 17dB.

PRODESO® SOUND STICK

UNCOUPLING AND SOUNDPROOF MEMBRANE

PRODESO® SOUND STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDSNDST 20	1,05	20	2,5	16	38,00	798,00	12768,00

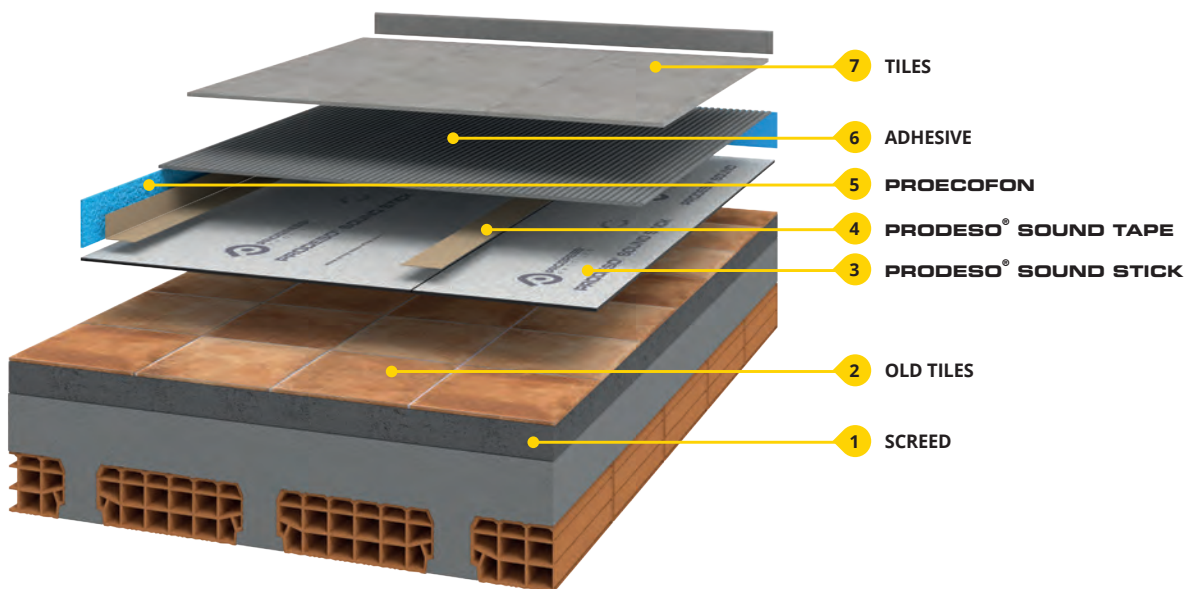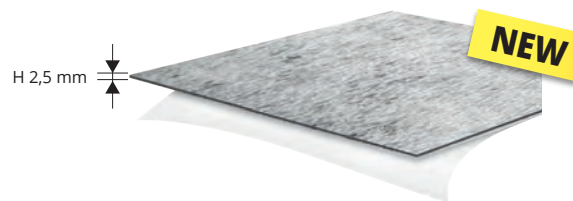

© 2024. All rights reserved by Progress Profiles. Printed in Italy

MEMBRANE
AND PANELS



PRODRAIN 10

DRAINING MEMBRANE

PRODRAIN 10 is a drainage membrane composed by an high density polyethylene (HDPE) sheet provided with truncated cone reliefs. On the top of the reliefs a non-woven polypropylene fabric, in grey colour, permeable to water is thermowelded.



H 10 mm

PRODRAIN 10 MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDRI 10	0,96	12,5	10	6	15,04	188,00	1128,00

AREAS OF USE

- **Use.** Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department.
- **Don't use.** On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermal-insulating layer.



MEMBRANE AND PANELS

PROBAND 150/250

ELASTIC ROLLS IN HDPE AND PP

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.



PROBAND 150/250

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll/Pack	€/m	€/Roll	€/Pallet
PRBPE 1507	150	7,5	0,42	16	5,70	42,75	684,00
PRBPE 1530	150	30	0,42	6	4,18	125,40	752,40
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20

PREFORMED CORNERS and PIPE COLLAR


Internal and external preformed corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support. Use on Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of PROFOIL, PRODESIO® MEMBRANE SYSTEM and PRODESIO® HEAT GRIP SYSTEM



EXTERNAL CORNER
PRBE



INTERNAL CORNER
PRBI



PIPE COLLAR
PRBT

PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP

Thickness 0,42 mm

Articolo	H x L mm	€/PZ	€/conf.
PRBI	60 x 120	8,23	82,30
PRBE	60 x 120	8,23	82,30
PRBT	125 x 125	7,29	72,90

WARNINGS

- **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents. adhesive.

© 2021 All rights reserved by Progress Profiles. Printed in Italy

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PROFOIL PRO


ROLLS IN HDPE AND PP

PROFOIL PRO MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLOPR 0430	1	30	0,42	40	16,28	488,40	19536,00

PROFOIL MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLO 0430	1	30	0,42	40	13,86	415,80	16632,00
PFLO 0405	1	5	0,42	154	19,29	96,45	14853,00

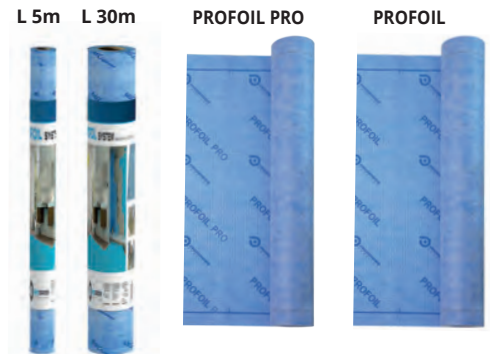

© 2024. All rights reserved by Progress Profiles. Printed in Italy

MEMBRANE
AND PANELS


= News 2024

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROFOIL PANEL

HIGH DENSITY EXTRUDED
POLYSTYRENE PANEL

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

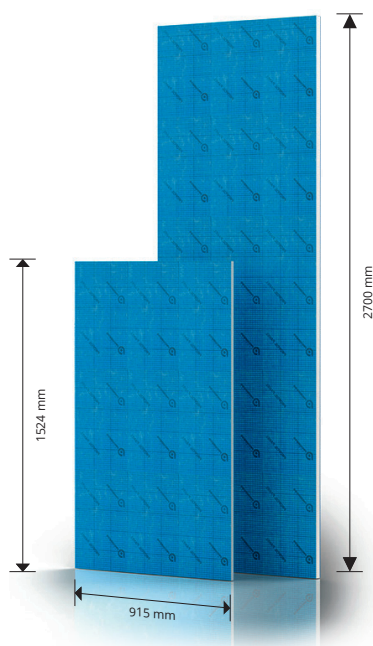


PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN927	9,50	80	197,60	46,43	114,68	9174,40
PFLPAN1327	12,70	60	148,20	48,04	118,66	7119,60
PFLPAN1627	15,9	50	123,50	51,65	127,58	6379,00
PFLPAN2527	25,00	30	74,10	57,75	142,64	4279,20
PFLPAN3827	38,10	20	49,40	63,66	157,25	3145,00
PFLPAN5027	50,80	10	24,70	80,85	199,70	1997,00




PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN6	6,35	85	118,49	37,80	52,69	4478,65

PROFOIL PANEL THICKNESS

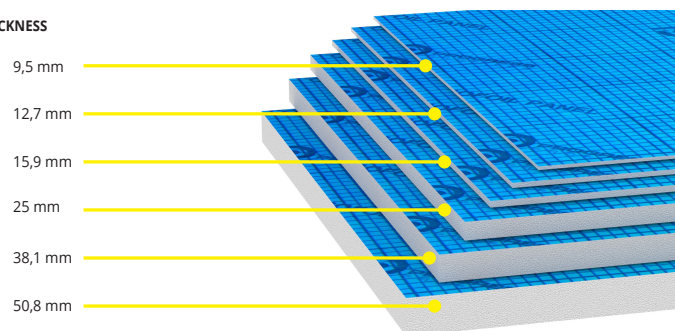

MEMBRANE
AND PANELS



© 2021 All rights reserved by Progress Profiles, Printed in Italy

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL DOWELS - ZINC-COATED METAL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,70	425,00
TZPFP 140	140	1,89	472,50
TZPFP 170	170	2,09	522,50
TZPFP 200	200	2,28	570,00



PROFOIL DOWELS - STAINLESS STEEL - pack. 250 Pc

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,28	820,00
TIPFP 140	140	3,53	882,50
TIPFP 170	170	3,79	947,50
TIPFP 200	200	4,04	1010,00
TIPFP 250	250	4,70	1175,00



PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACFPF 35	1000	35	0,04	40,00
VACFPF 55	1000	45	0,05	50,00
VACFPF 80	1000	80	0,10	100,00



PROFOIL PANEL WASHERS (ZINC-COATED METAL) - pack. 100 Pc

Article	Pcs/Pack.	Ø mm	€/Pc	€/Pack.
RFPFP 36	100	35	0,32	32,00

☺ = News 2024

* = Production on demand. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.



PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes. The insert is adjustable or removable.

PROFOIL PANEL NICHE

HIGH DENSITY EXTRUDED POLYSTYRENE

PROFOIL PANEL NICHE - WATERPROOFING NICHE

Article	Description	Pcs/Pack.	€/Pc
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	1	69,67
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	1	81,01
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	1	107,13
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	1	120,33

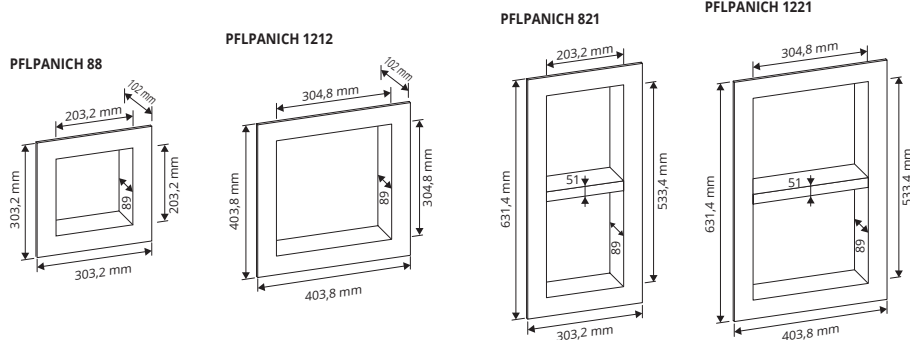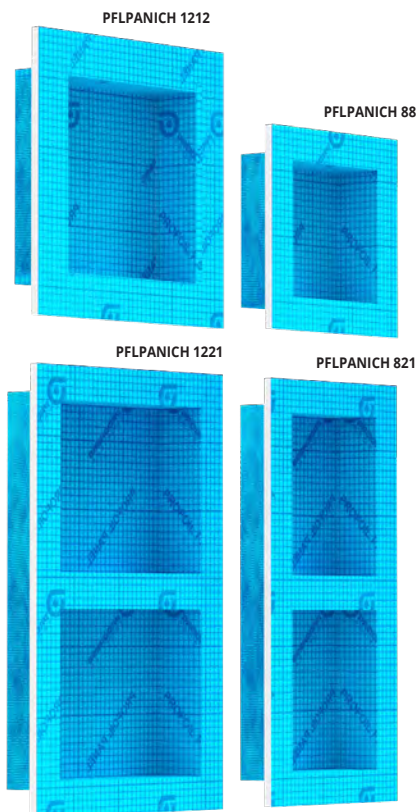

© 2024. All rights reserved by Progress Profiles. Printed in Italy



MEMBRANE AND PANELS

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.